

PRODUCT CATALOG 2017

Design
with
Lighting
光影艺术

IG LIGHTING 

IG LIGHTING PRODUCT CATALOG 2017

声明：本书所列之产品外观及技术参数仅供参考，我司保留最终解释权，如产品外观及参数有更改，我司保留不预先通告之权利。
如有任何疑问，请致电客服热线：+86-760-22555981

Disclaimer: The technical information and appearance of products appearing in this catalogue is indicative only and subject to revision. IG reserves the right to revise information without notice.

IG LIGHTING 

中山爱奇光电科技有限公司 IG LIGHTING

地址：广东省中山市小榄镇工业大道北 22 号

[http:// www.ig-lighting.com](http://www.ig-lighting.com)

电话：+86-760-22555981 传真：+86-760-22555982



因为创意
才会锐变
每一次改变
是为每一束
最专业的灯光



IG LIGHTING 

中山爱奇艺光电科技有限公司，简称“爱奇艺光电”“IG Lighting”“IG 照明”，创立于2012年，是一家秉承科技、智能、创新、服务至上的理念，缔造光影艺术，将生活与工业美感结合，集LED绿色照明产品研发、生产、销售和服务于一体的专业照明公司。

爱奇艺光电一直专注于酒店、店铺、餐饮、办公四大门类照明设计需求，针对性提供产品方案，形成了包括天花射灯、洗墙灯、筒灯、导轨灯、办公灯、支架灯、线性灯带等多个专业产品品类，以专业的系统服务深获客户好评。

定位在“Design with Lighting”“缔造光影艺术”的IG照明，围绕用户、市场需求，开创IG定制+服务，给用户高品质照明产品以及专业的照明设计服务，为顾客提供“专业定制级灯光”，实现IG照明在商业照明领域中极具专业的品牌地位。



中国	产品	酒店	餐饮	店铺	商超	办公
广东	连锁照明	 CROWNE PLAZA GUANGZHOU CITY CENTRE 广州中心皇冠假日酒店				
	酒店	 开元酒店集团 NEW CENTURY HOTELS & RESORTS				
	餐饮	 INTERCONTINENTAL HOTELS & RESORTS				
	店铺	 Hilton				
	商超					
	办公	 假日酒店 Holiday Inn	 徐記海鮮 长沙海鲜领导品牌			
						
						
						

洗墙灯


Page.006



Page.010




Page.014



Page.018



Page.021



天花灯

Page.025




Page.028



Page.032



Page.035



Page.038



Page.040



筒灯

Page.044



Page.048



轨道式射灯

Page.054



Page.055



Page.056



Page.057



Page.059



Page.061



Page.064



Page.066



Page.068



Page.070



Page.072



Page.073



Page.075



Page.080



Page.082



Page.084



Page.086



Page.088



Page.089



Page.091



线型灯

Page.099



Page.101



Page.103



Page.104



办公吊线灯

Page.105



Page.106



Page.107



Page.108



Page.109



Page.110



Page.111



Page.112



Page.113



Page.114



Page.115



办公灯盘

Page.117



Page.118



支架灯灯

Page.119



灯带

Page.120



光的语言

环境照明，重点照明，演绎照明；这些正是优质照明设计所应遵循的原则。



环境照明




环境照明 + 重点照明




环境照明 + 重点照明 + 演绎照明

垂直照明


垂直照明可以通过多种技术实现控光；IG 系列产品包含针对此类应用的多种精选的特殊照明器件，非对称反射器或光学系统可以确保墙面光分布均匀，杜绝溢光，使能效最大化。

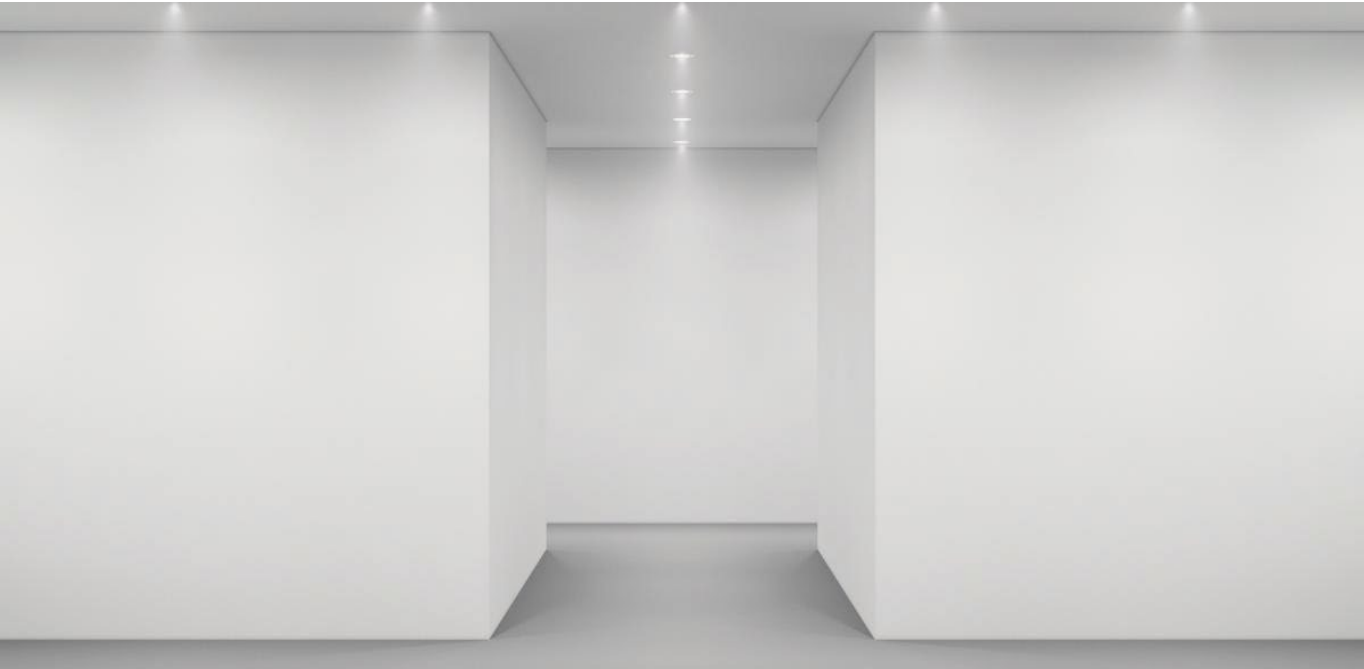


轨道式墙面布光

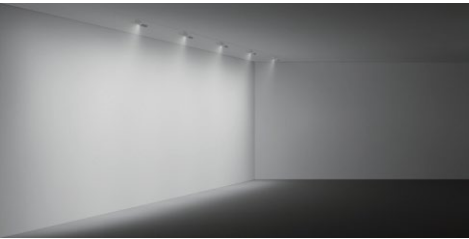

嵌入式墙面布光

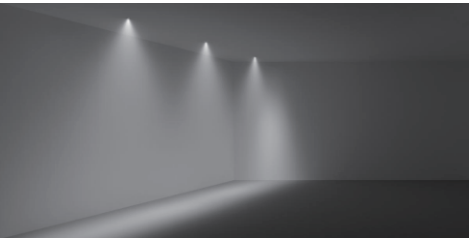


顶棚式面布光

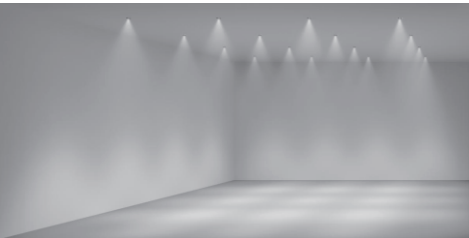



Wallwasher
洗墙灯

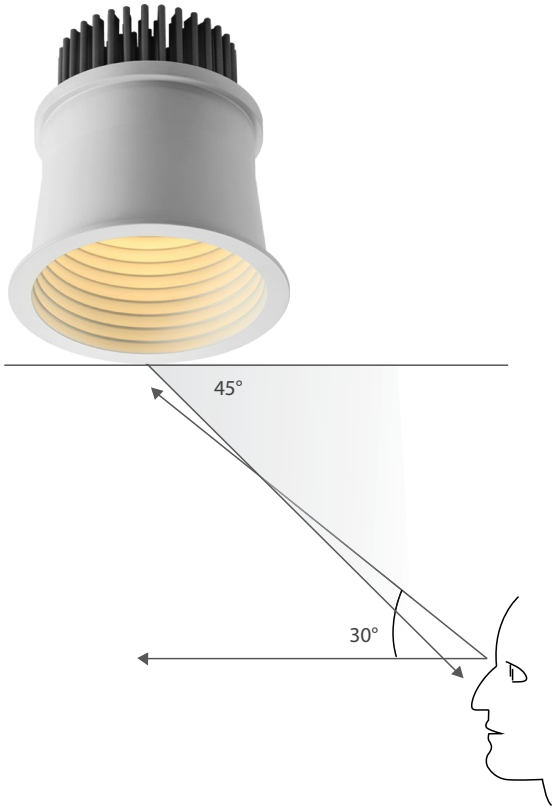


Glare-control

The glare-cuf reaches 45° MAX, offering good glare control.
The MAX glare-cut which human can bear is 30° MAX af horizontal.
Otherwise, glare is visible.

The glare-cuf of **IG** Diamond is over 30°.
The glare is consequenfly well kept beyond the glare area.


Accurate light distribution and control

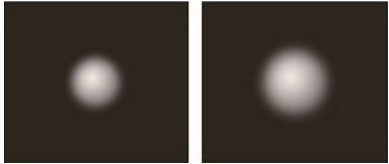

12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting
the different demands for lighting.

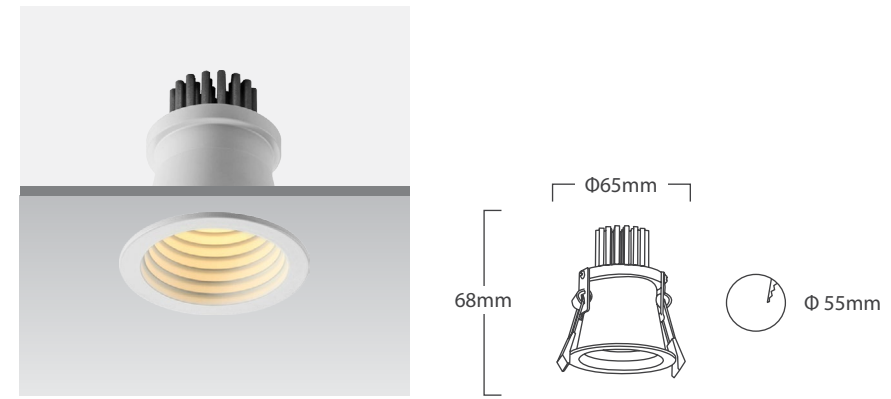


电路负载 Circuit load 5W 45pcs L_N=2.5M²

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ505505 01	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA



产品描述 Description:	IG-XQ505505 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥250lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	5W
开孔尺寸 Maintenance category:	Φ 55mm
装箱数 QTY/CTN:	45PCS

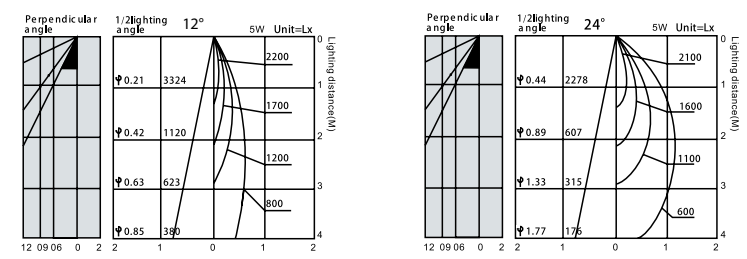

Accurate light distribution and control

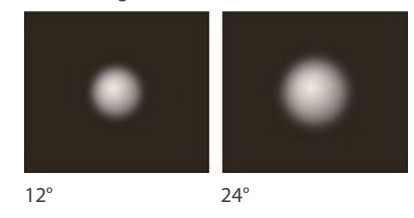

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

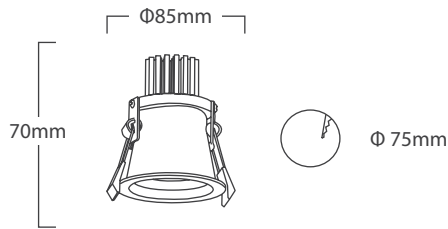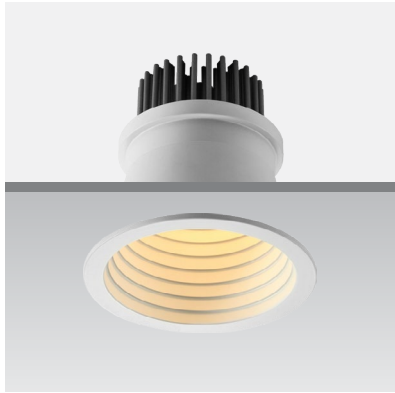

电路负载 Circuit load




产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ507508 02	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ507508 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥400 lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS

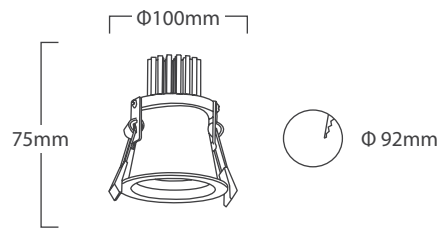

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ509212 03	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ509212 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥600lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	12W
开孔尺寸 Maintenance category:	Φ 92mm
装箱数 QTY/CTN:	30PCS






Accurate light distribution and control

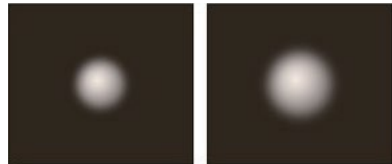

12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

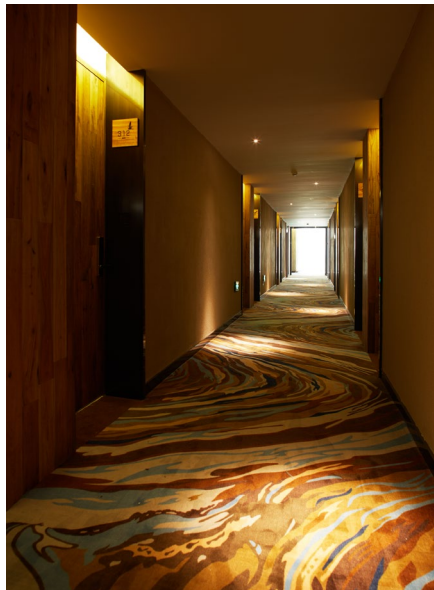





Accurate light distribution and control



12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

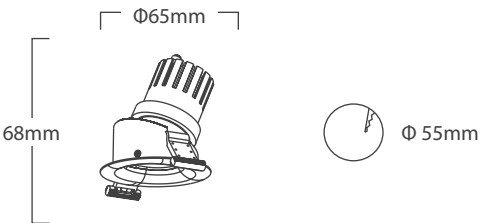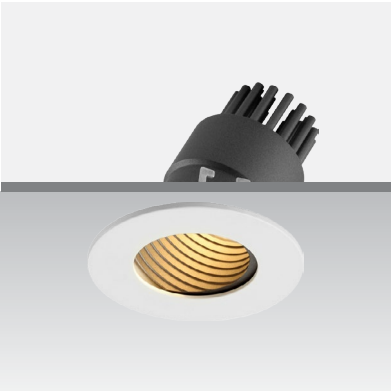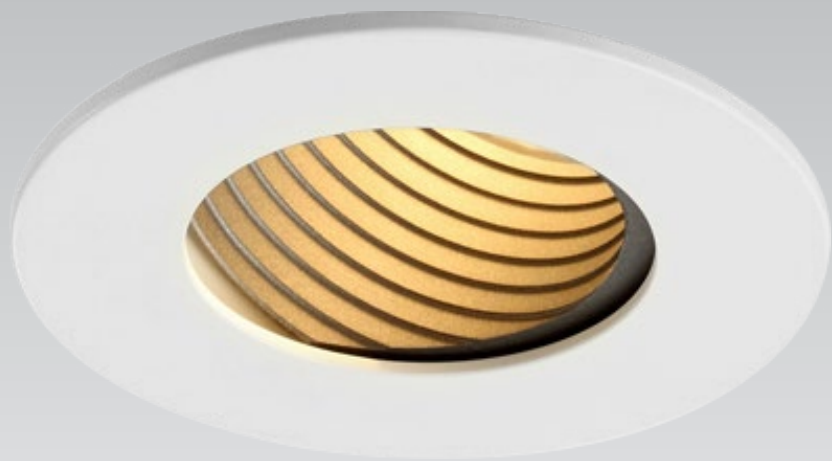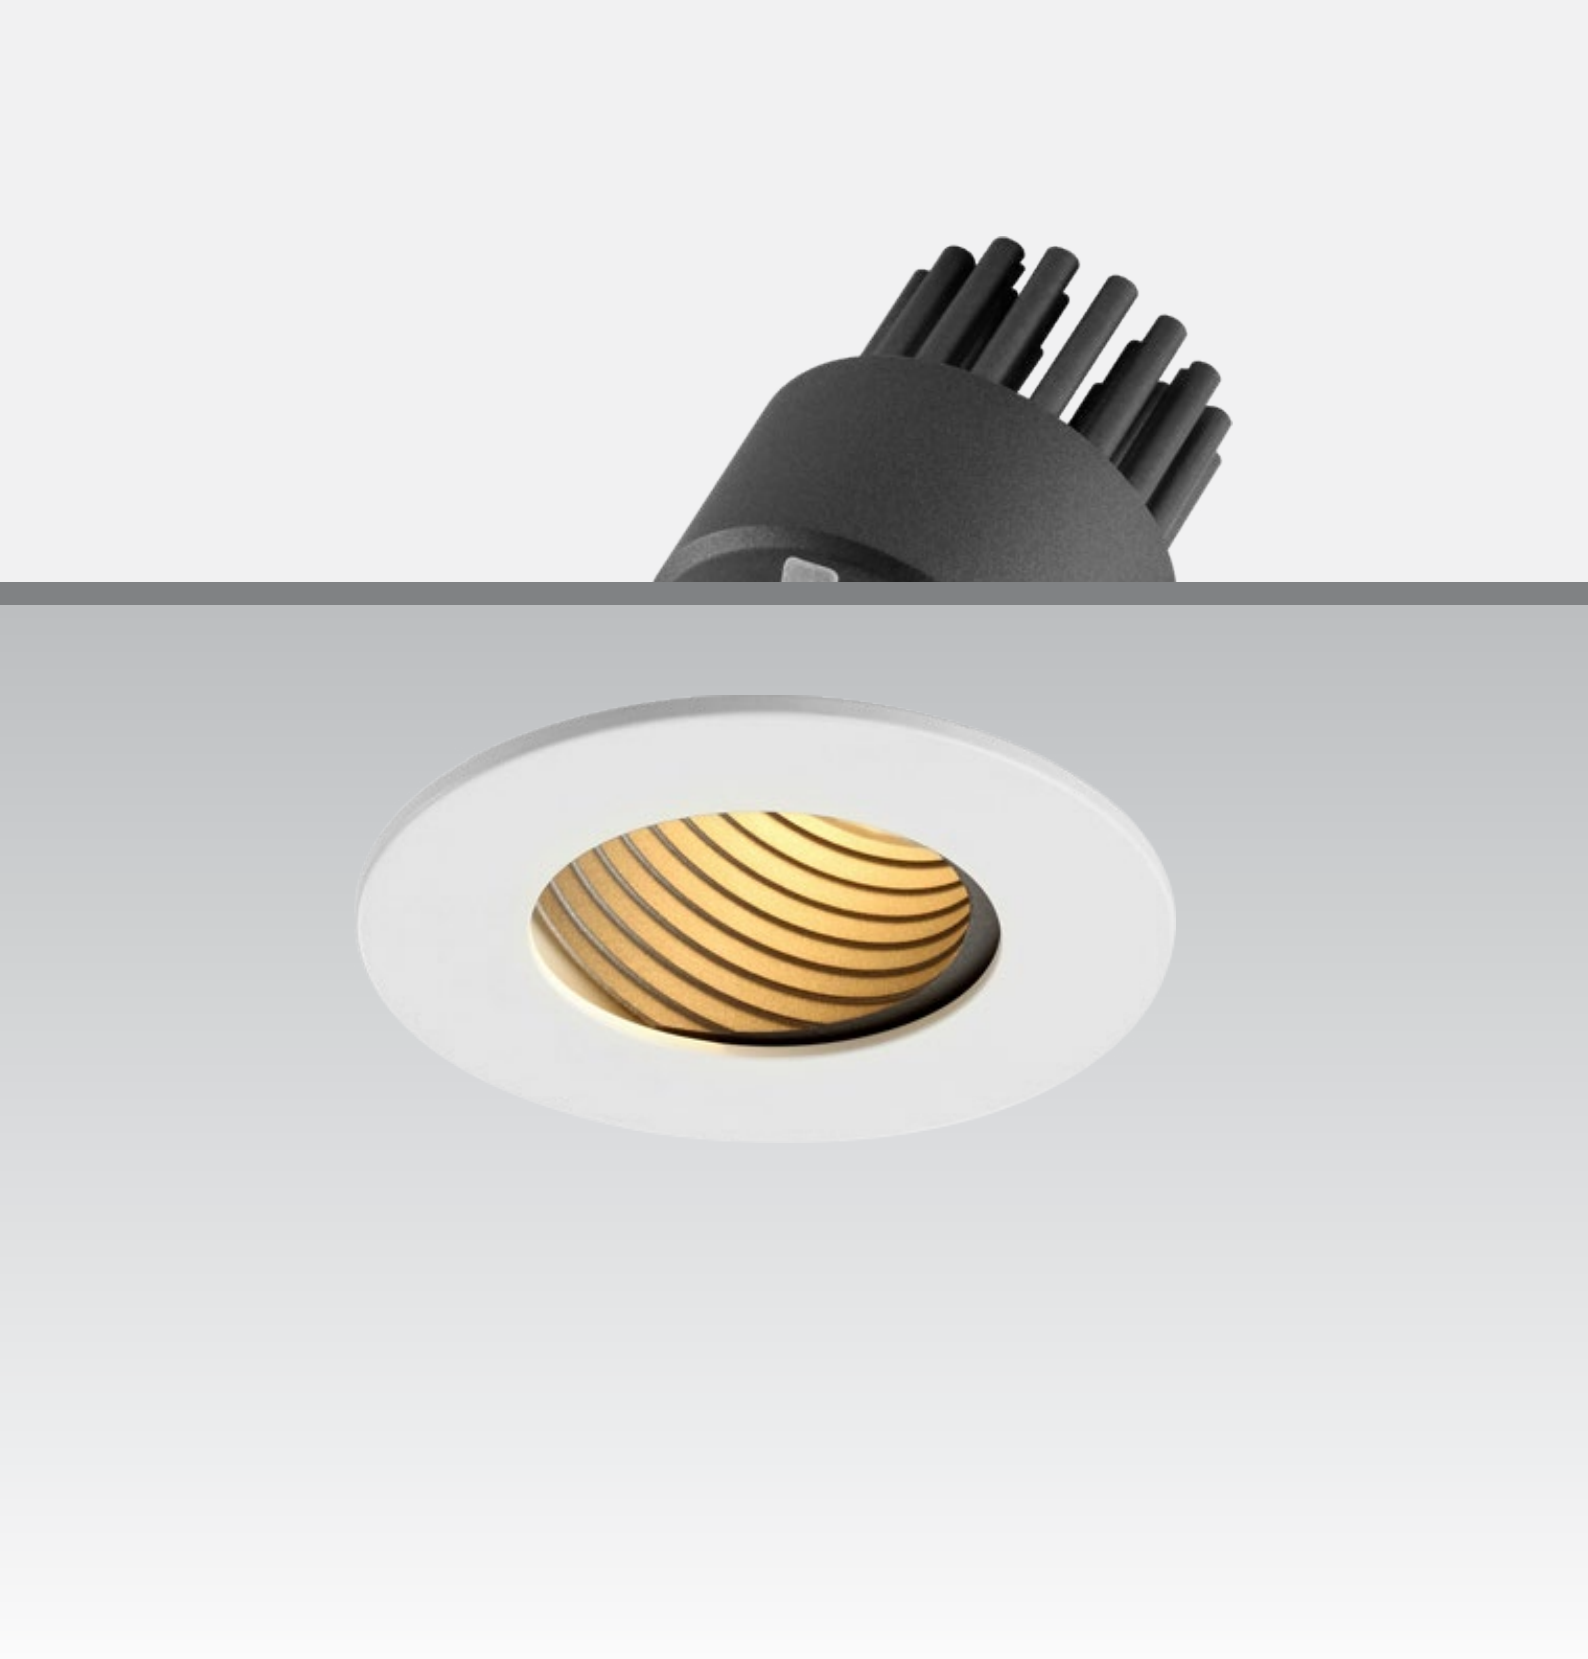

电路负载 Circuit load




5W 45pcs	L N
----------	--------

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ505505 05	3000K / 4000K	220-240V	45pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ505505 05
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥300lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	5W
开孔尺寸 Maintenance category:	Φ 55mm
装箱数 QTY/CTN:	45PCS

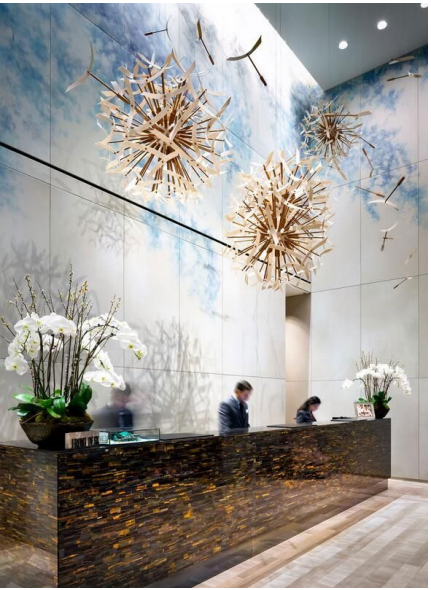

Accurate light distribution and control


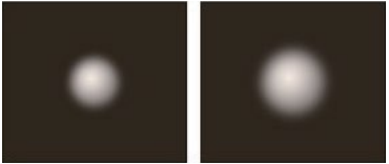


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.



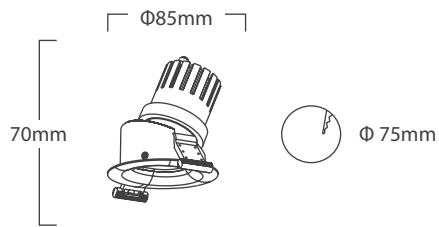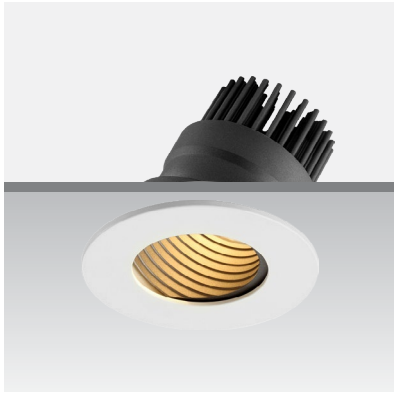

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ507508 06	3000K / 4000K	220-240V	45pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ507508 06
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥480lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS



Accurate light distribution and control



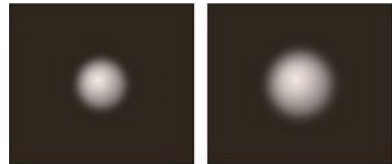


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.



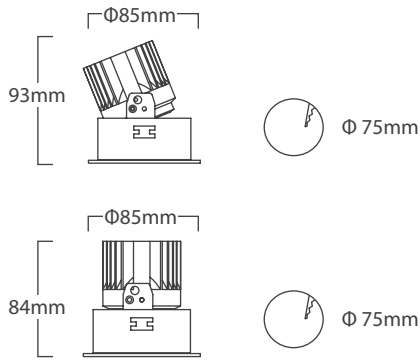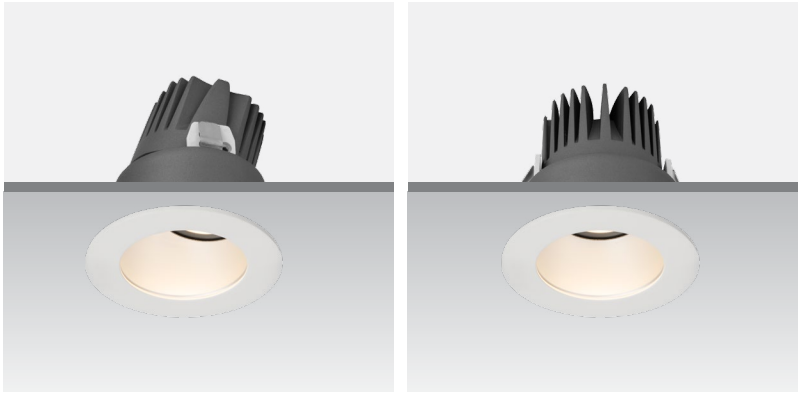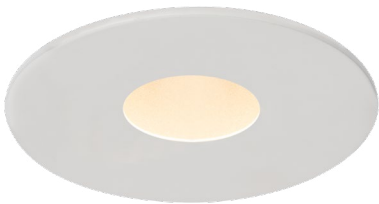

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-IG-XQ307508 01	3000K / 4000K	220-240V	45pcs	WH BL GR
IG-IG-XQ307508 02	3000K / 4000K	220-240V	45pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ307508 01	IG-XQ307508 02
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥400lm	≥400lm
光效率 Luminaire efficacy:	≥50lm/W	≥50lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	15D 24D 36D	15D 24D 36D
功率 Luminaire input power:	8W	8W
开孔尺寸 Maintenance category:	Φ 75mm	Φ 75mm
装箱数 QTY/CTN:	45PCS	45PCS



Accurate light distribution and control


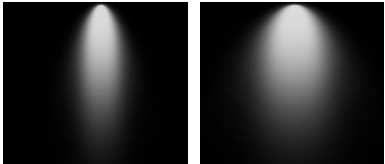


15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.

卡兹 KATZ
美术馆级光质量

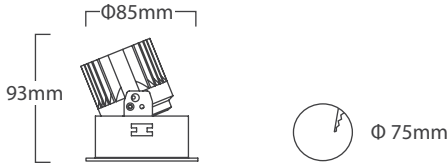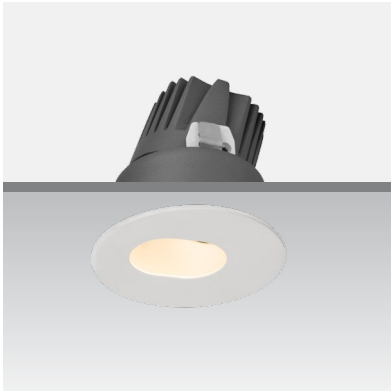

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ307508 03	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ307508 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥320lm
光效率 Luminaire efficacy:	≥40lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 36D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS





Accurate light distribution and control

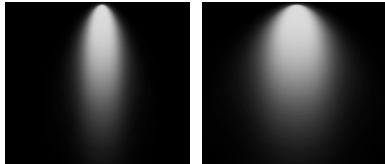

15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.

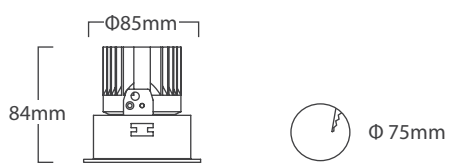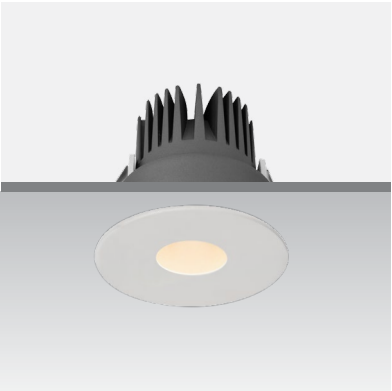

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ307508 04	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ307508 04
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥280lm
光效率 Luminaire efficacy:	≥35lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control

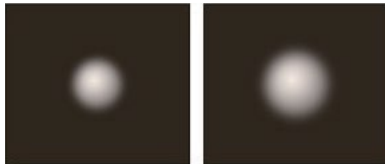

15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.

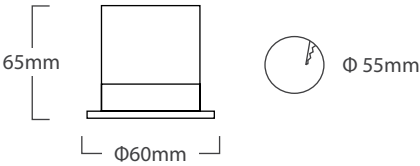


电路负载	Circuit load
5W	45pcs
L N =2.5M ²	

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH005505 01	3000K / 4000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述	Description:	IG-TH005505 01
光源	Light Source:	COB
光通量	Luminaire Luminous flux:	≥275lm
光效率	Luminaire efficacy:	≥55lm/W
显色指数	Colour Rendering Index:	80
光束角	Beam angle:	12D 24D 38D
功率	Luminaire input power:	5W
开孔尺寸	Maintenance category:	Φ 55mm
装箱数	QTY/CTN:	45PCS

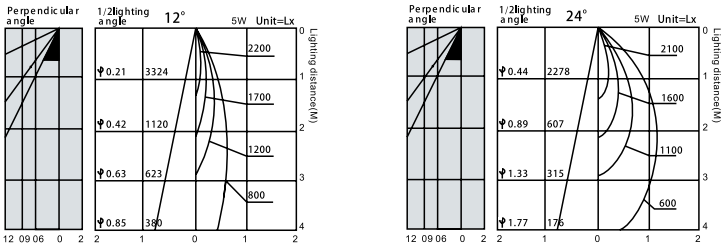


Accurate light distribution and control

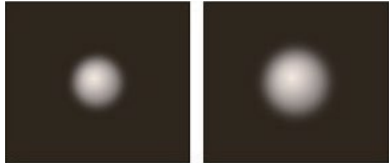

12° 24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.



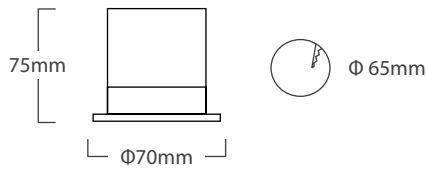

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH006508 02	3000K / 4000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH006508 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥440lm
光效率 Luminaire efficacy:	≥55lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	12D 24D 38D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	Φ 65mm
装箱数 QTY/CTN:	45PCS

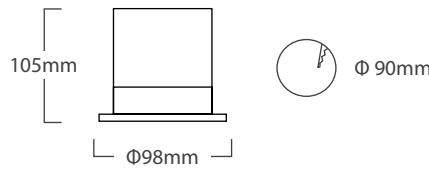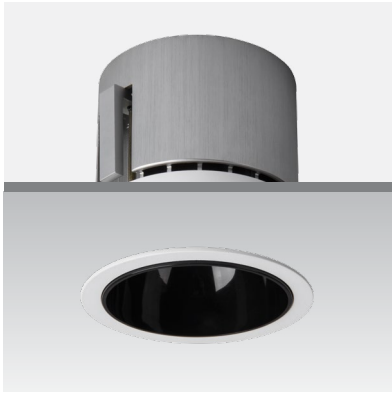

电路负载 Circuit load





产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TH009020 03	3000K / 4000K	220-240V	30pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH009020 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1200lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	12D 24D 38D
功率 Luminaire input power:	20W
开孔尺寸 Maintenance category:	Φ 90mm
装箱数 QTY/CTN:	30PCS





Accurate light distribution and control



12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.




Accurate light distribution and control



12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

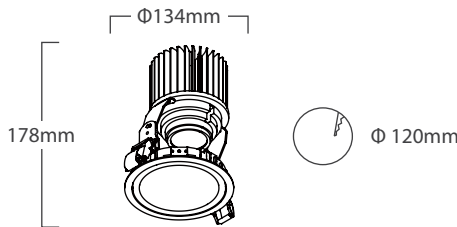

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ012035 01	3000K / 4000K	220-240V	6pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ012035 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1750lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 26D 36D
功率 Luminaire input power:	35W
开孔尺寸 Maintenance category:	Φ 120mm
装箱数 QTY/CTN:	6PCS




Accurate light distribution and control

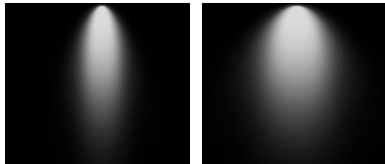

15°

26°

Diamond series have three kinds of beam angles, 15° 26°, meeting the different demands for lighting.

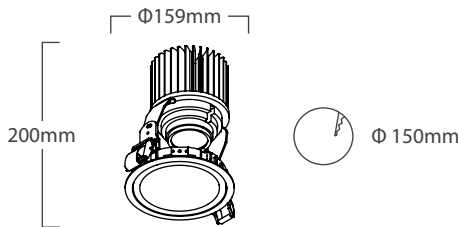

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-XQ015045 02	3000K / 4000K	176-230V	6pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-XQ015045 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥2250lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 26D 36D
功率 Luminaire input power:	45W
开孔尺寸 Maintenance category:	Φ 150mm
装箱数 QTY/CTN:	6PCS



Accurate light distribution and control

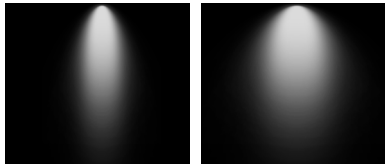


15°

26°

Diamond series have three kinds of beam angles, 15° 26°, meeting the different demands for lighting.



Ceiling spot
天花灯



电路负载 Circuit load




产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH006504 01	3000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH006504 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥280 lm
光效率 Luminaire efficacy:	≥70lm/W
显色指数 Colour Rendering Index:	85
光束角 Beam angle:	38D
功率 Luminaire input power:	4W
开孔尺寸 Maintenance category:	Φ 65mm
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control



38°

Diamond series have three kinds of beam angles, 38°, meeting the different demands for lighting.

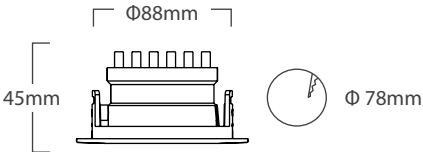

电路负载 Circuit load




产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH007806 03	3000K / 4000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH007806 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥390lm
光效率 Luminaire efficacy:	≥65lm/W
显色指数 Colour Rendering Index:	85
光束角 Beam angle:	24D
功率 Luminaire input power:	6W
开孔尺寸 Maintenance category:	Φ 78mm
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control



24°

Diamond series have three kinds of beam angles, 24°, meeting the different demands for lighting.

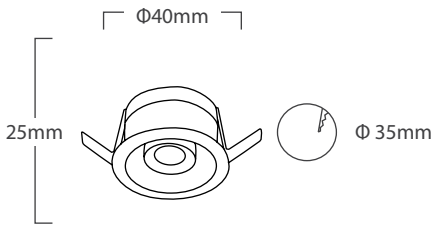

电路负载 Circuit load


2W 45pcs	$L_N = 2.5\text{M}^2$
----------	-----------------------

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH003502 02	3000K / 4000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH003502 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	$\geq 120\text{lm}$
光效率 Luminaire efficacy:	$\geq 60\text{lm/W}$
显色指数 Colour Rendering Index:	85
光束角 Beam angle:	13D 25D 36D
功率 Luminaire input power:	2W
开孔尺寸 Maintenance category:	$\Phi 35\text{mm}$
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control

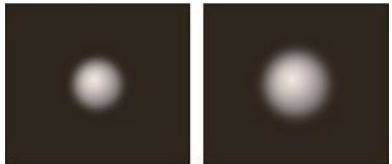

13°

25°

Diamond series have three kinds of beam angles, 13° 24°, meeting the different demands for lighting.

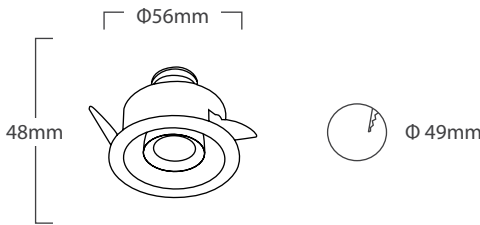

电路负载 Circuit load




产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TH004905 03	3000K / 4000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH004905 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥300 lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	13D 25D 36D
功率 Luminaire input power:	5W
开孔尺寸 Maintenance category:	Φ 49mm
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control



13°

25°

Diamond series have three kinds of beam angles, 13° 24°, meeting the different demands for lighting.

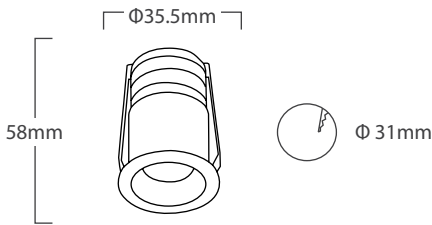

电路负载 Circuit load




产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TH003103 01	3000K / 4000K	220-240V	45pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH003103 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥150lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 25D 36D
功率 Luminaire input power:	3W
开孔尺寸 Maintenance category:	Φ 31mm
装箱数 QTY/CTN:	45PCS



Accurate light distribution and control



15°

25°

Diamond series have three kinds of beam angles, 15° 25°, meeting the different demands for lighting.





电路负载	Circuit load	12W 12pcs	L N	=2.5M ²
------	--------------	-----------	--------	--------------------


产品选项	Selection				
Description	Color temperature	ACV=	PS	Option	
IG-TH007512 01	3000K / 4000K	220-240V	12pcs	☐ WH	

产品参数 PRODUCT DATA

产品描述	Description:	IG-TH007512 01
光源	Light Source:	COB
光通量	Luminaire Luminous flux:	≥840lm
光效率	Luminaire efficacy:	≥70lm/W
显色指数	Colour Rendering Index:	80
光束角	Beam angle:	12D 24D 38D
功率	Luminaire input power:	12W
开孔尺寸	Maintenance category:	Φ 75mm
装箱数	QTY/CTN:	12PCS




Accurate light distribution and control

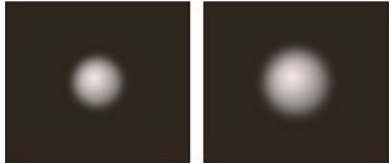


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

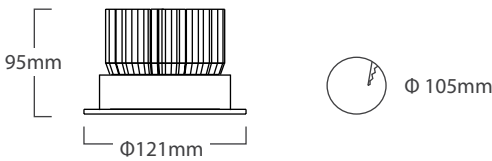

电路负载 Circuit load




产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TH010518 02	3000K / 4000K	220-240V	10pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH010518 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1260lm
光效率 Luminaire efficacy:	≥70lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	12D 24D 38D
功率 Luminaire input power:	18W
开孔尺寸 Maintenance category:	Φ 105mm
装箱数 QTY/CTN:	10PCS

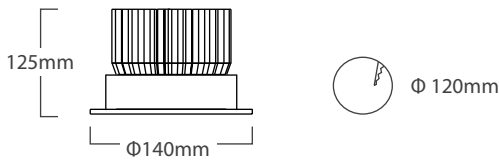

电路负载 Circuit load





产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TH012028 03	3000K / 4000K	220-240V	8pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH012028 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1960lm
光效率 Luminaire efficacy:	≥70lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	12D 24D 38D
功率 Luminaire input power:	28W
开孔尺寸 Maintenance category:	Φ 120mm
装箱数 QTY/CTN:	8PCS





Accurate light distribution and control




12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.




Accurate light distribution and control

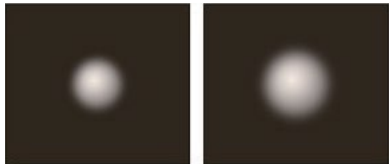

12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

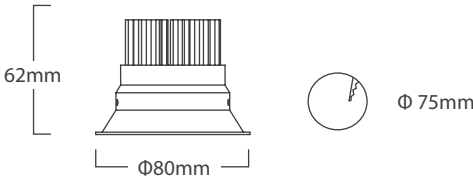

电路负载 Circuit load





产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TH007508 01	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH007508 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥400lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control



12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

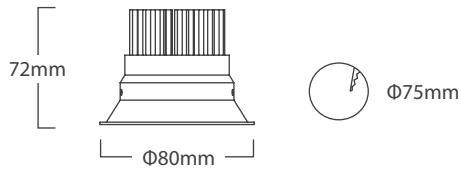

电路负载 Circuit load





产品选项 Selection

Description	Color temperature	ACV=	PS	Option
TH009212 02	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH009212 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥600lm
光效率 Luminaire efficacy:	≥50lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 30D
功率 Luminaire input power:	12W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS




Accurate light distribution and control



12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

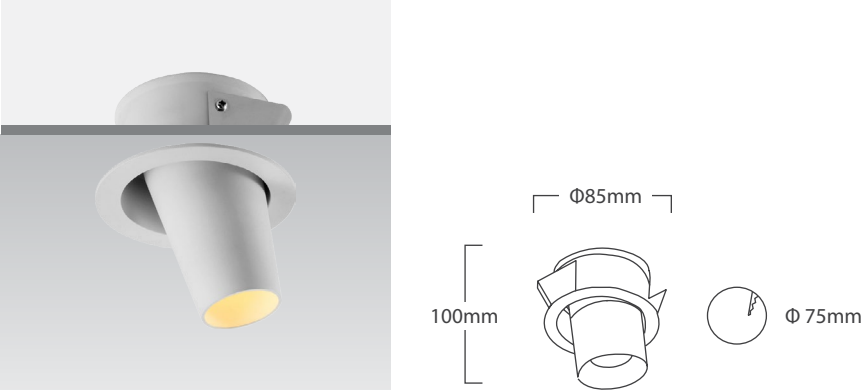


电路负载	Circuit load
8W 30pcs	
L N=2.5M²	

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH507508 01	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述	Description:	IG-TH507508 01
光源	Light Source:	COB
光通量	Luminaire Luminous flux:	≥400 lm
光效率	Luminaire efficacy:	≥50lm/W
显色指数	Colour Rendering Index:	90
光束角	Beam angle:	12D 24D
功率	Luminaire input power:	8W
开孔尺寸	Maintenance category:	Φ 75mm
装箱数	QTY/CTN:	30PCS

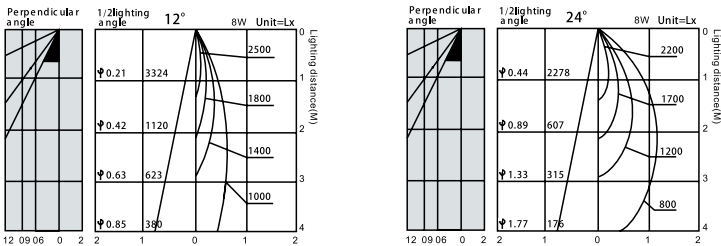


Accurate light distribution and control

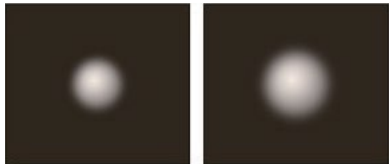

12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

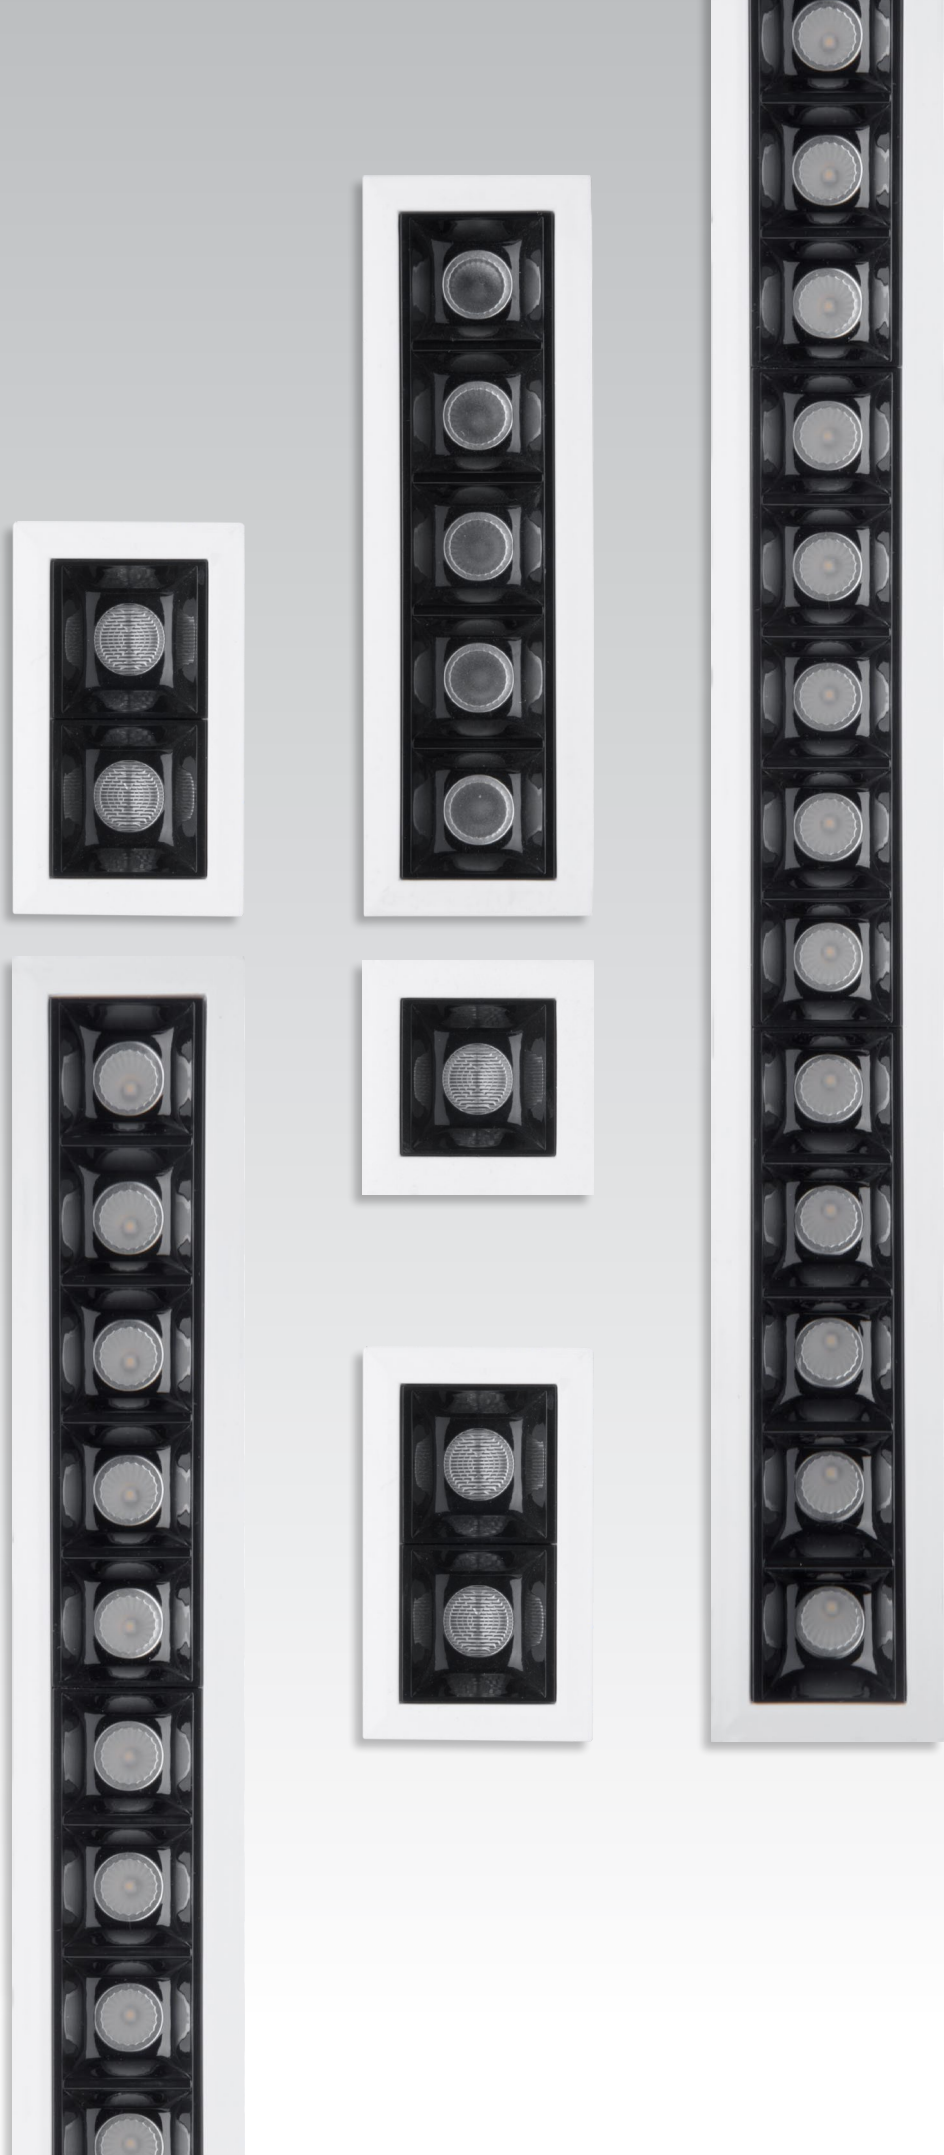

41x4.5 cm / 2Wx15



14.7x4.5 cm / 2Wx5



7.5x4.5 cm / 2Wx2



4.5x4.5 cm / 2Wx1




产品选项 Selection


Description	Color temperature	ACV=	PS
IG-GSA04030	3000K / 4000K	220-240V	12pcs
IG-GSA13710	3000K / 4000K	220-240V	12pcs
IG-GSA06504	3000K / 4000K	220-240V	12pcs
IG-GSA04502	3000K / 4000K	220-240V	12pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG-GSA40030	IG-GSA13710	IG-GSA06504	IG-GSA04502
光源 Light Source:	COB	COB	COB	COB
光通量 Luminaire Luminous flux:	≥1800 lm	≥600 lm	≥240 lm	≥120 lm
光效率 Luminaire efficacy:	≥60lm/W	≥60lm/W	≥60lm/W	≥60lm/W
显色指数 Colour Rendering Index:	90	90	90	90
光束角 Beam angle:	12D 24D	12D 24D	12D 24D	12D 24D
功率 Luminaire input power:	30W	10W	4W	2W
开孔尺寸 Maintenance category:	400x35mm	137x35mm	65x35mm	35x35mm
装箱数 QTY/CTN:	12PCS	12PCS	12PCS	12PCS



Accurate light distribution and control

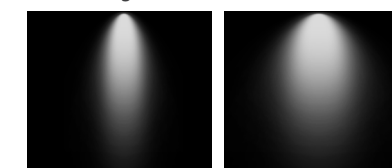

12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.



Downlight
筒灯





电路负载	Circuit load	5W 45pcs	L N	=2.5M ²
------	--------------	----------	--------	--------------------


产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TD505505 01	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述	Description:	IG-TD505505 01
光源	Light Source:	COB
光通量	Luminaire Luminous flux:	≥350lm
光效率	Luminaire efficacy:	≥70lm/W
显色指数	Colour Rendering Index:	>80
光束角	Beam angle:	60D
功率	Luminaire input power:	5W
开孔尺寸	Maintenance category:	Φ 55mm
装箱数	QTY/CTN:	45PCS

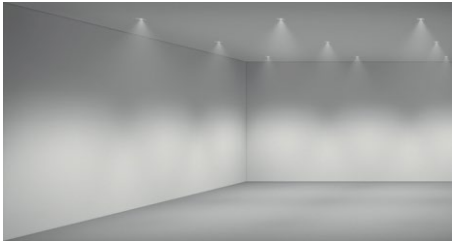

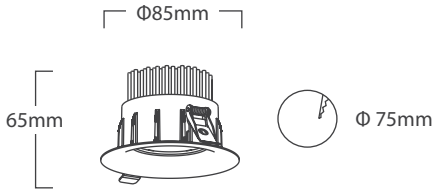

电路负载 Circuit load






产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TD507507 02	3000K / 4000K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TD507507 02
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	≥560 lm
光效率 Luminaire efficacy:	≥80lm/W
显色指数 Colour Rendering Index:	>80
光束角 Beam angle:	60D
功率 Luminaire input power:	7W
开孔尺寸 Maintenance category:	Φ 75mm
装箱数 QTY/CTN:	45PCS

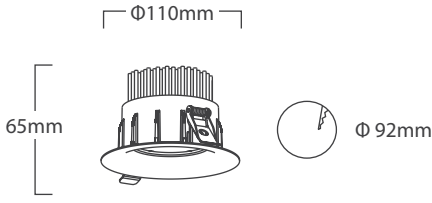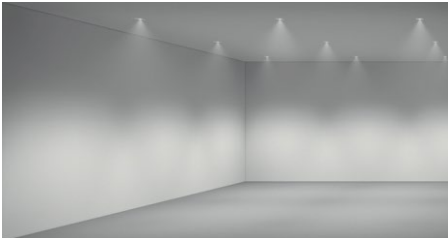

电路负载 Circuit load






产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TD509212 03	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TD509212 03
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	≥960 lm
光效率 Luminaire efficacy:	≥80lm/W
显色指数 Colour Rendering Index:	>80
光束角 Beam angle:	60D
功率 Luminaire input power:	12W
开孔尺寸 Maintenance category:	Φ 92mm
装箱数 QTY/CTN:	30PCS

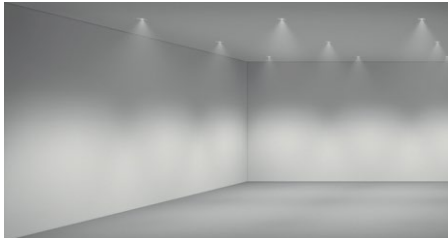

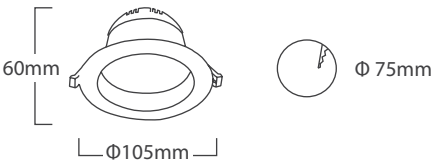



电路负载	Circuit load	5W 45pcs	L N	=2.5M ²
------	--------------	----------	--------	--------------------


产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TD607505 01	3000K / 4000K / 6500K	220-240V	45pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述	Description:	IG-TD607505 01
光源	Light Source:	SMD
光通量	Luminaire Luminous flux:	≥400 lm
光效率	Luminaire efficacy:	≥80lm/W
显色指数	Colour Rendering Index:	80
光束角	Beam angle:	60D
功率	Luminaire input power:	5W
开孔尺寸	Maintenance category:	Ø 75mm
装箱数	QTY/CTN:	45PCS

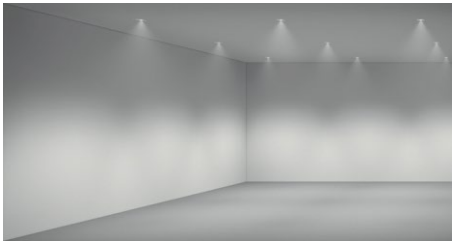

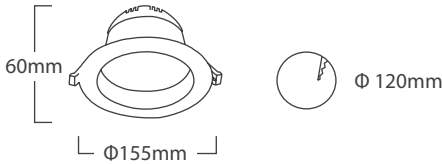

电路负载 Circuit load




产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TD612012 02	3000K / 4000K / 6500K	220-240V	45pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TD612012 02
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	≥960 lm
光效率 Luminaire efficacy:	≥80lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	60D
功率 Luminaire input power:	12W
开孔尺寸 Maintenance category:	Φ 120mm
装箱数 QTY/CTN:	45PCS

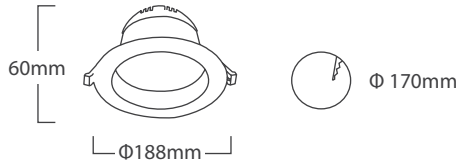

电路负载 Circuit load








产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-TD617018 03	3000K / 4000K / 6500K	220-240V	30pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TD617018 03
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	≥1440 lm
光效率 Luminaire efficacy:	≥80lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	60D
功率 Luminaire input power:	18W
开孔尺寸 Maintenance category:	Φ 170mm
装箱数 QTY/CTN:	30PCS

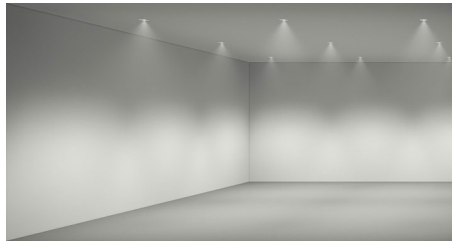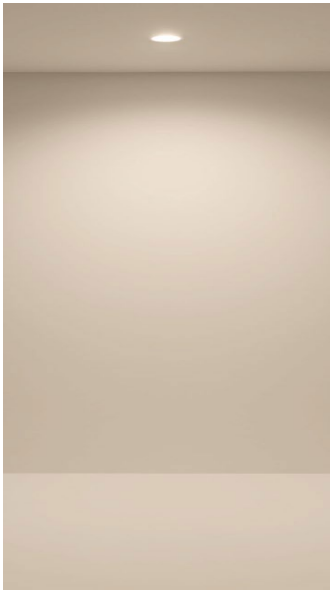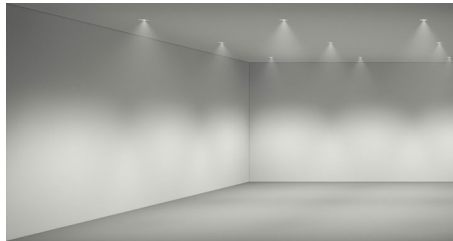



Track light
导轨式射灯







电路负载	Circuit load
8W / 12W 24pcs	


产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG30520801 / IG-DG30521202	3000K / 4000K	220-240V	24pcs	☐ WH ☒ BL ☐ GR
IG-MS30520801 / IG-MS30521202	3000K / 4000K	220-240V	24pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述	Description:	IG-DG305208 01 / IG-DG305212 02	IG-MS305208 01 / IG-MS305212 02
光源	Light Source:	COB	COB
光通量	Luminaire Luminous flux:	400 lm / 600 lm	400 lm / 600 lm
光效率	Luminaire efficacy:	≥ 50 lm/W	≥ 50 lm/W
显色指数	Colour Rendering Index:	90	90
光束角	Beam angle:	12D 24D 36D	12D 24D 36D
功率	Luminaire input power:	8W / 12W	8W / 12W
开孔尺寸	Maintenance category:	C-Closed Top Reflector	C-Closed Top Reflector
装箱数	QTY/CTN:	24PCS	24PCS



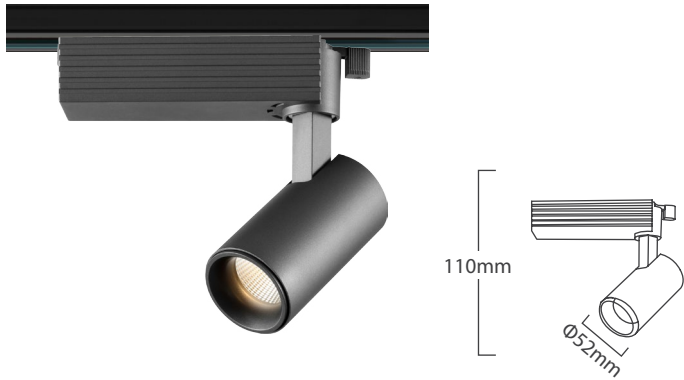

电路负载 Circuit load





8W 30pcs / 12W 30pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG305208 03	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR
IG-DG305212 04	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG305208 03	IG-DG305212 04
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥480 lm	≥720 lm
光效率 Luminaire efficacy:	≥60 lm/W	≥60 lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	15D 24D 36D	15D 24D 36D
功率 Luminaire input power:	8W	12W
开孔尺寸 Maintenance category:	C-Closed Top Reflector	C-Closed Top Reflector
装箱数 QTY/CTN:	30PCS	30PCS



Accurate light distribution and control

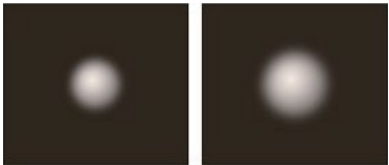

15° 24°
Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.



电路负载 Circuit load





8W 30pcs / 12W 30pcs


产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG305208 05	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR
IG-DG305212 06	3000K / 4000K	220-240V	30pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG305208 05	IG-DG305212 06
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥400 lm	≥600 lm
光效率 Luminaire efficacy:	≥50lm/W	≥50lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	12D 24D 36D	12D 24D 36D
功率 Luminaire input power:	8W	12W
开孔尺寸 Maintenance category:	C-Closed Top Reflector	C-Closed Top Reflector
装箱数 QTY/CTN:	30PCS	30PCS



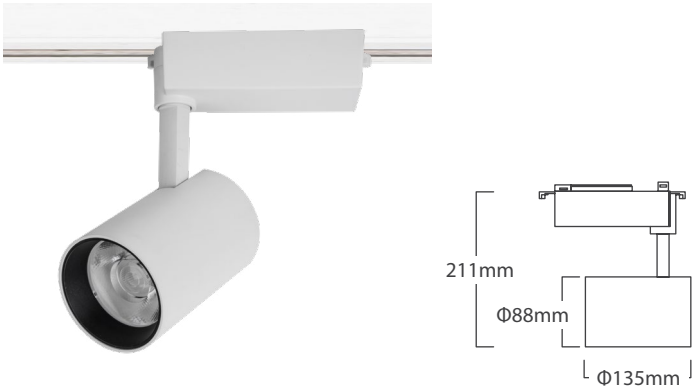

电路负载 Circuit load



35W 12pcs

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG308835 10	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG308835 10
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥2275 lm
光效率 Luminaire efficacy:	≥65lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 36D
功率 Luminaire input power:	35W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS



Accurate light distribution and control



15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.



电路负载 Circuit load



20W 24pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG307020 09	3000K / 4000K	220-240V	24pcs	☐ WH ☒ BL

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG307020 09
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1400 lm
光效率 Luminaire efficacy:	≥70lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 36D
功率 Luminaire input power:	20W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	24PCS




Accurate light distribution and control

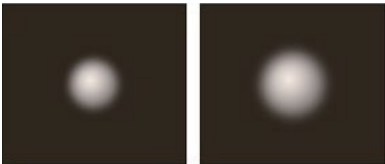

15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.



电路负载 Circuit load


8W / 12W / 15W 12pcs

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG006015 01	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG006015 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥520 lm / ≥780 lm / ≥975 lm
光效率 Luminaire efficacy:	≥65lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 38D
功率 Luminaire input power:	8W / 12W / 15W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS



电路负载 Circuit load



20W / 25W 12pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG007320 02	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG007320 02
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1400 lm / ≥1750 lm
光效率 Luminaire efficacy:	≥70lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 38D
功率 Luminaire input power:	20W / 25W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS





Accurate light distribution and control

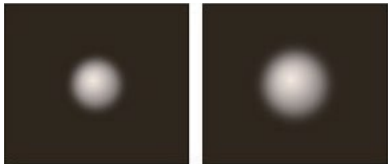


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.




Accurate light distribution and control

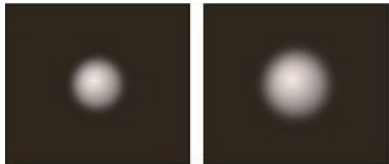

15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.

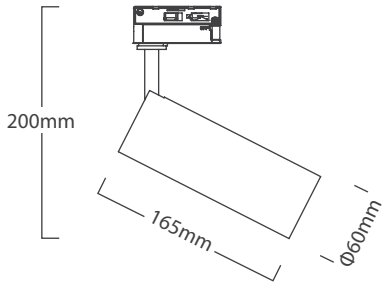

电路负载 Circuit load


8W / 12W 24pcs

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG506008 01	3000K / 4000K	220-240V	24pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG506008 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥480 lm ≥720 lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 36D
功率 Luminaire input power:	8W / 12W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	24PCS



电路负载 Circuit load



20W 12pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG507320 01	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG507320 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1200lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 36D
功率 Luminaire input power:	20W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS





Accurate light distribution and control

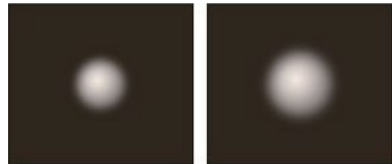


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.





Accurate light distribution and control

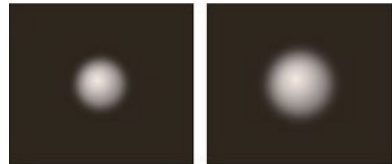

15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.

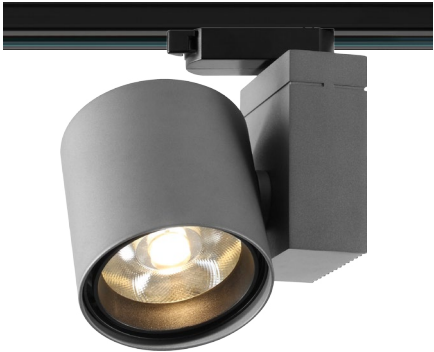

电路负载 Circuit load



30W 12pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG309530 08	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG309530 08
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1950 lm
光效率 Luminaire efficacy:	≥65 lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	10D 24D 36D
功率 Luminaire input power:	30W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS



Accurate light distribution and control


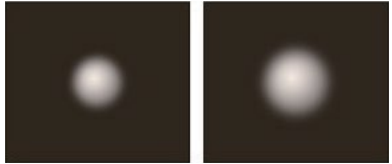


10°

24°

Diamond series have three kinds of beam angles, 10° 24°, meeting the different demands for lighting.

卡兹 KATZ
美术馆级光质量

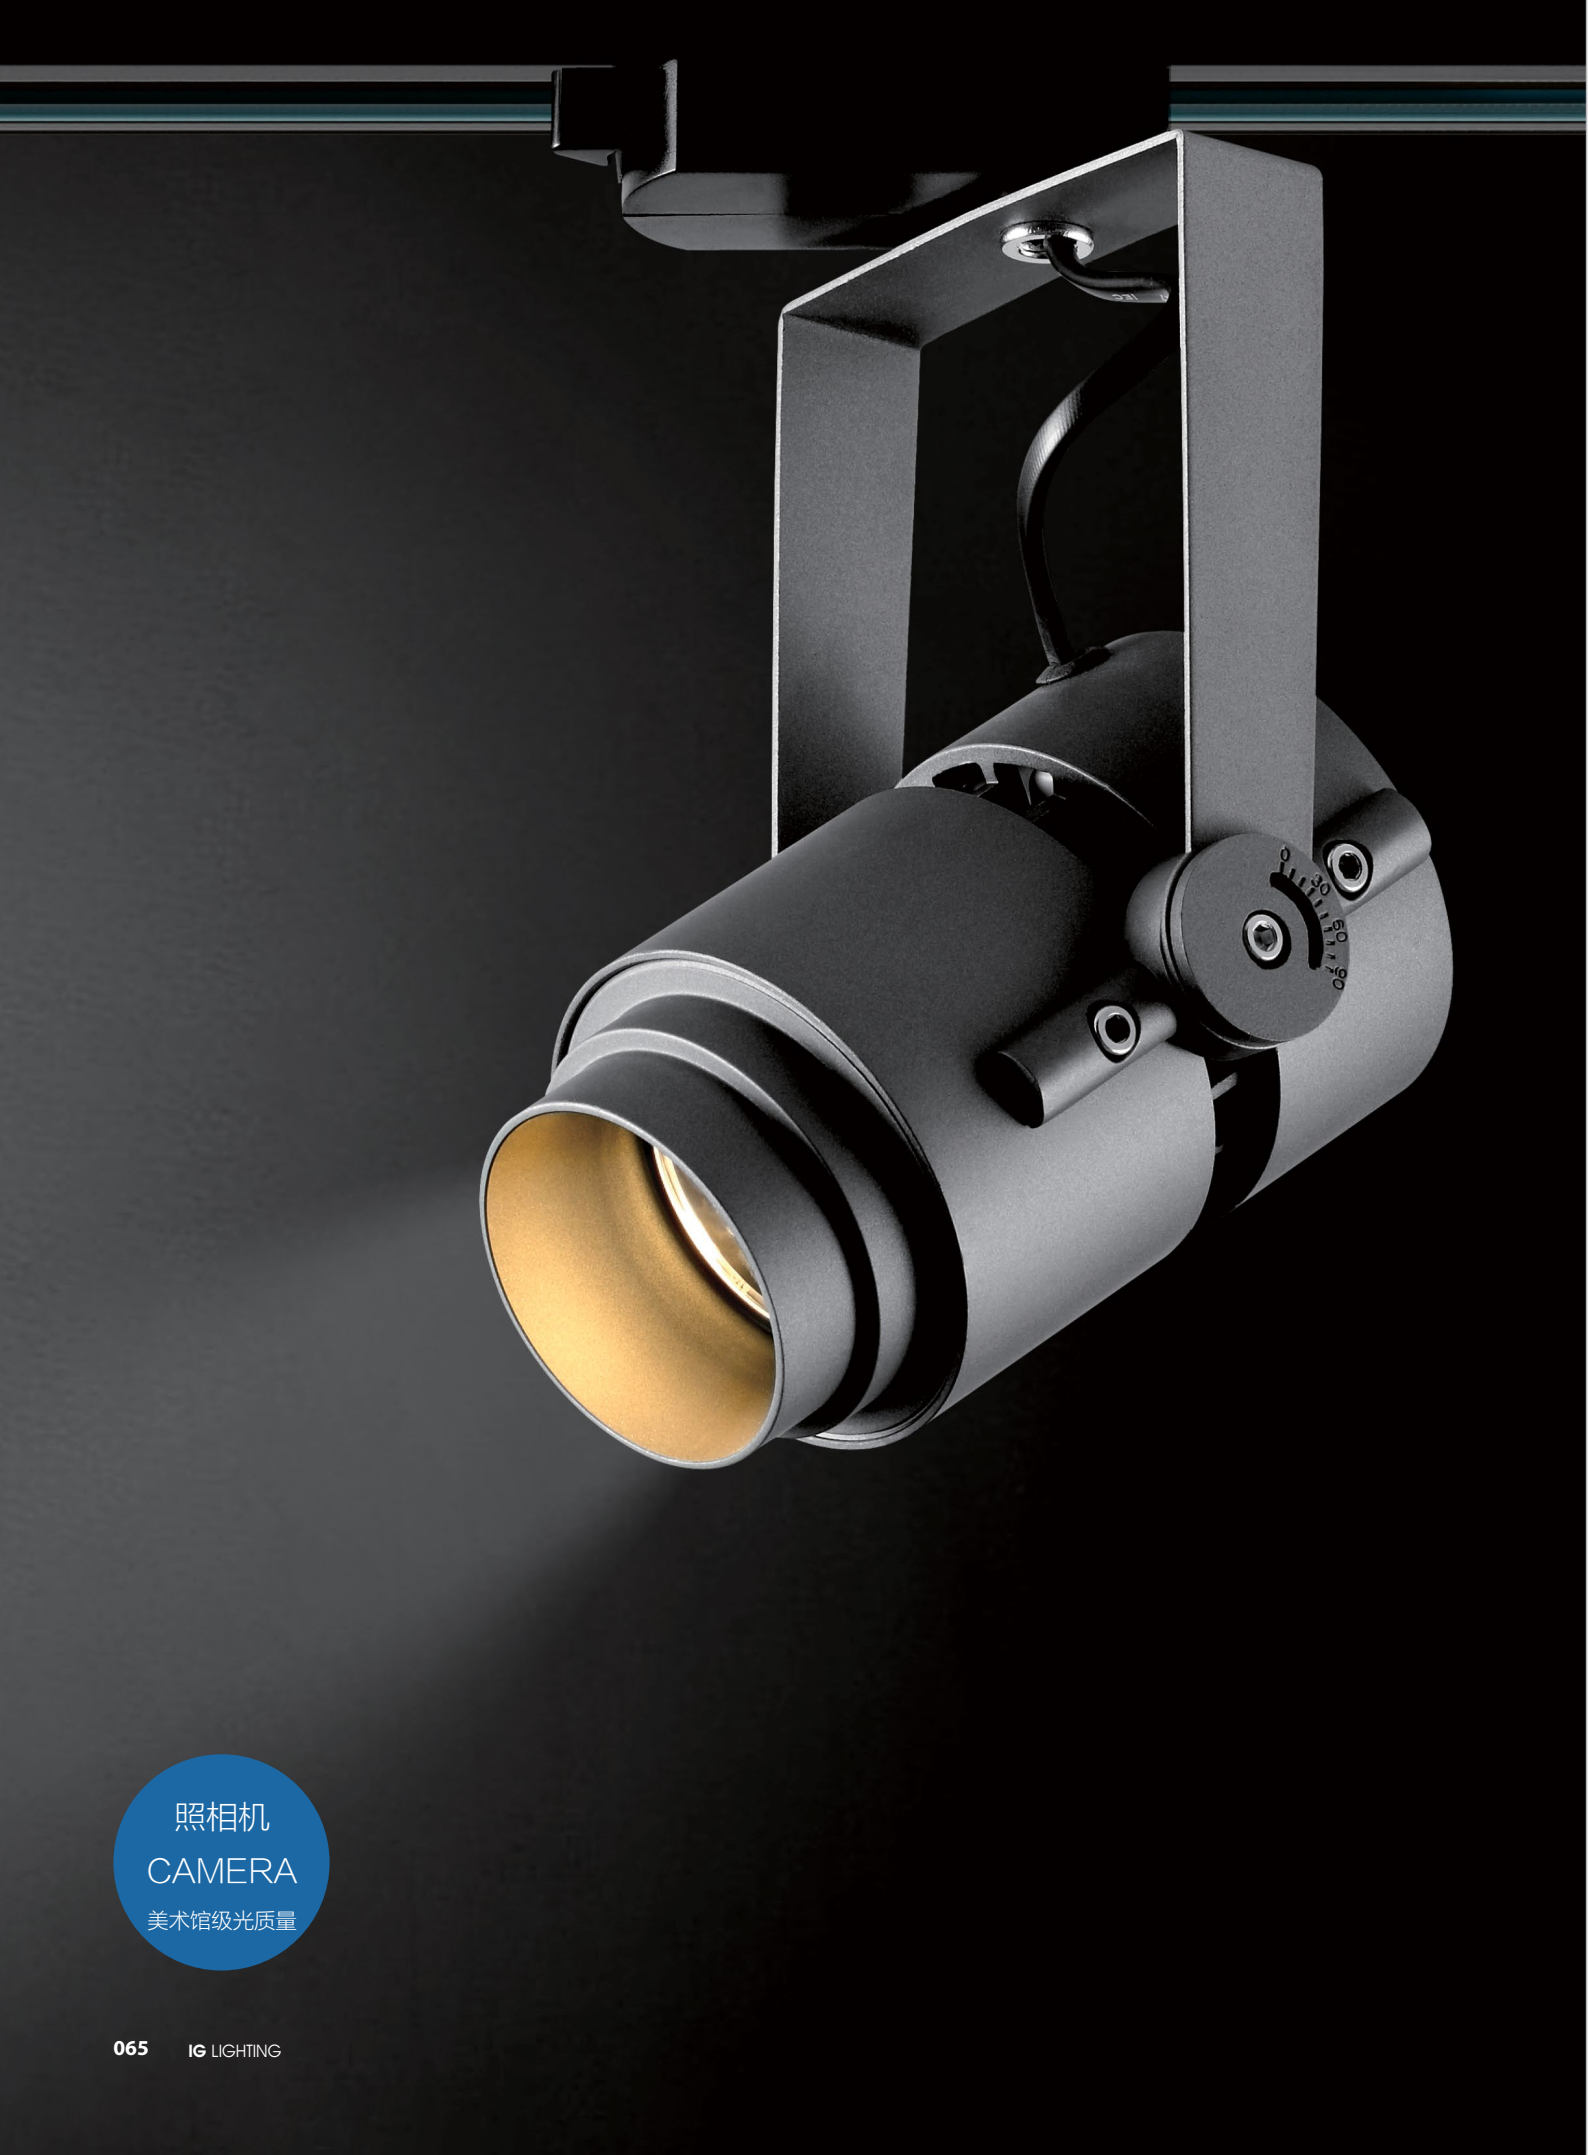

电路负载 Circuit load





12W / 20W 12pcs

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG308512 01	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR
IG-DG308520 02	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA


产品描述 Description:	IG-DG308512 01	IG-DG308520 02
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥720 lm	≥1200 lm
光效率 Luminaire efficacy:	≥60 lm/W	≥60 lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	15D 24D 36D	15D 24D 36D
功率 Luminaire input power:	12W	20W
开孔尺寸 Maintenance category:	C-Closed Top Reflector	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS	12PCS



照相机
CAMERA
美术馆级光质量



照相机
CAMERA
美术馆级光质量



电路负载 Circuit load



30W 12pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG310330 03	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG310330 03
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1950 lm
光效率 Luminaire efficacy:	≥65 lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 36D
功率 Luminaire input power:	30W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS



Accurate light distribution and control

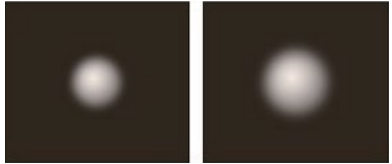


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.



木马人
Trojan people II
美术馆级光质量



	Ø	L	H
30W	98	210	200
35W	98	210	200

电路负载 Circuit load





30W 12pcs / 35W 12pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG109830 01	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR
IG-DG109835	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG109830 01	IG-DG109835
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥1950 lm	≥2275 lm
光效率 Luminaire efficacy:	≥65lm/W	≥65lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	12D 24D 36D	12D 24D 36D
功率 Luminaire input power:	30W	35W
开孔尺寸 Maintenance category:	C-Closed Top Reflector	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS	12PCS




Accurate light distribution and control

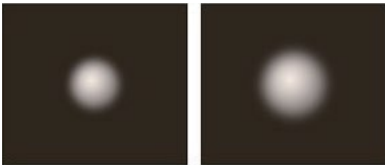

12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

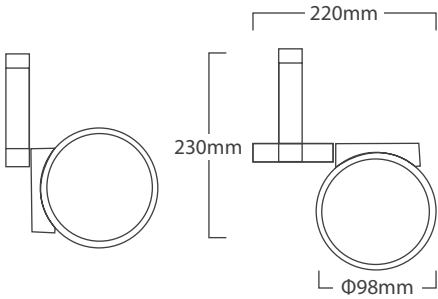

电路负载 Circuit load




20W 12pcs

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-DG209820	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG209820
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1200 lm
光效率 Luminaire efficacy:	≥60 lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 36D
功率 Luminaire input power:	20W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	12PCS

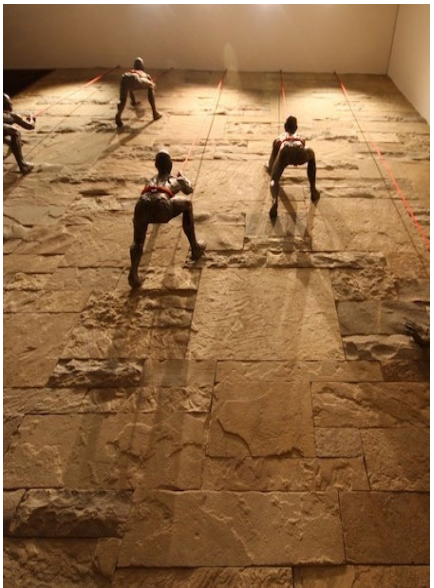

Accurate light distribution and control

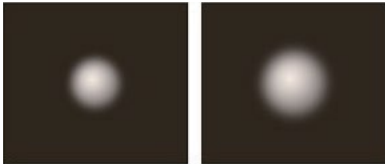


15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.





电路负载 Circuit load


	35W 8pcs
--	----------

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG009835 01	3000K / 4000K	220-240V	8pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG009835 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥2100 lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 38D
功率 Luminaire input power:	35W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	8PCS



电路负载 Circuit load



	45W 8pcs
--	----------

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG010845 01	3000K / 4000K	220-240V	8pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-DG010845 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥2700lm
光效率 Luminaire efficacy:	≥60lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 38D
功率 Luminaire input power:	45W
开孔尺寸 Maintenance category:	C-Closed Top Reflector
装箱数 QTY/CTN:	8PCS





Accurate light distribution and control



15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.



Accurate light distribution and control



15°

24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.





电路负载	Circuit load
12W 24pcs	

产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-DG310012 01	3000K / 4000K	220-240V	24pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述	Description:	IG-DG310012 01
光源	Light Source:	COB
光通量	Luminaire Luminous flux:	≥720 lm
光效率	Luminaire efficacy:	≥60lm/W
显色指数	Colour Rendering Index:	90
光束角	Beam angle:	10D 24D
功率	Luminaire input power:	12W
开孔尺寸	Maintenance category:	C-Closed Top Reflector
装箱数	QTY/CTN:	24PCS



Accurate light distribution and control



10°



24°

Diamond series have three kinds of beam angles, 10° 24°, meeting the different demands for lighting.





Recessed light
嵌入式射灯

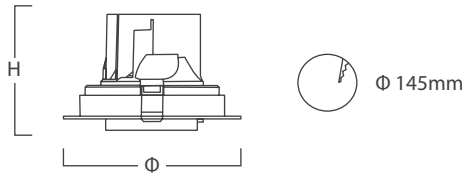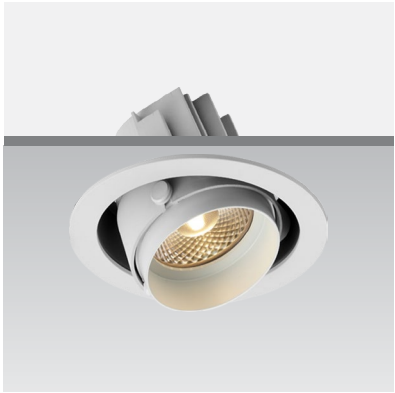

	Φ	H
30W	170	110
35W	170	110

电路负载 Circuit load





30W 12pcs / 35W 12pcs	L N =2.5M ²
-----------------------	---------------------------

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH114530	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR
IG-TH114535	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH114530	IG-TH114535
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥2100 lm	≥2450 lm
光效率 Luminaire efficacy:	≥70lm/W	≥70lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	12D 24D	12D 24D
功率 Luminaire input power:	30W	35W
开孔尺寸 Maintenance category:	Φ 145mm	Φ 145mm
装箱数 QTY/CTN:	12PCS	12PCS




Accurate light distribution and control

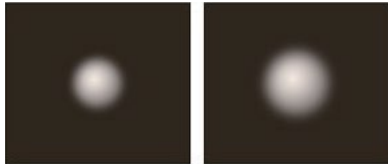

12° 24°
Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.



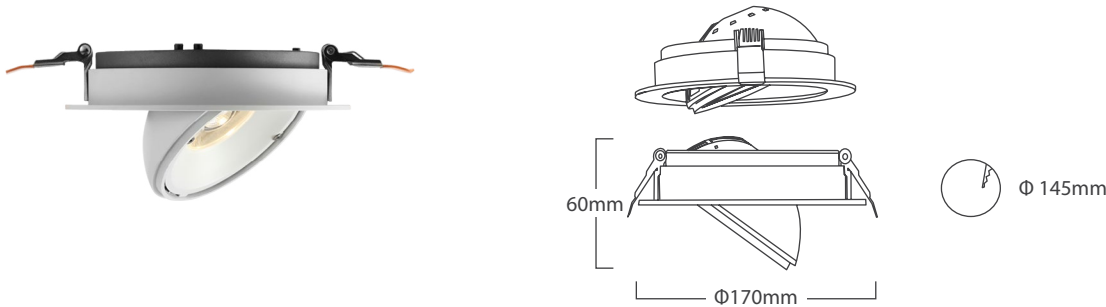


电路负载	Circuit load	20W 12pcs	L N	=2.5M ²
------	--------------	-----------	--------	--------------------

产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH214520	3000K / 4000K	220-240V	12pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述	Description:	IG-TH214520
光源	Light Source:	COB
光通量	Luminaire Luminous flux:	≥1200 lm
光效率	Luminaire efficacy:	≥60lm/W
显色指数	Colour Rendering Index:	90
光束角	Beam angle:	15D 24D 36D
功率	Luminaire input power:	20W
开孔尺寸	Maintenance category:	Φ 145mm
装箱数	QTY/CTN:	12PCS

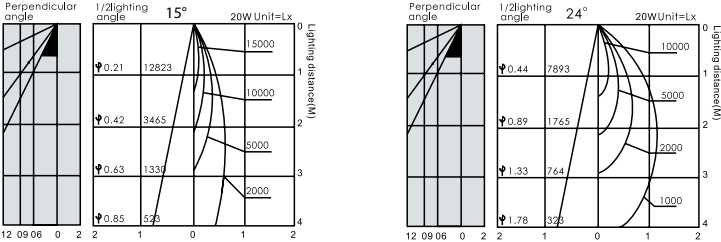


Accurate light distribution and control

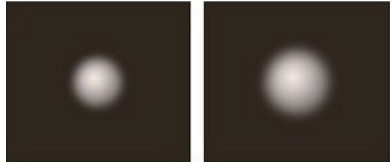

15° 24°
Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.



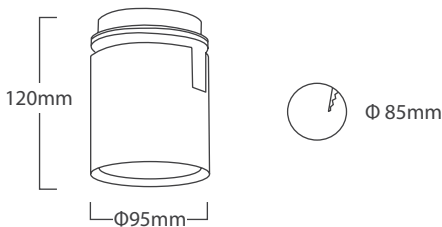

电路负载 Circuit load





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH308530	3000K / 4000K	220-240V	12pcs	☐ WH ☒ BL ☐ GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH308530
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥1950lm
光效率 Luminaire efficacy:	≥65lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	10D 24D 36D
功率 Luminaire input power:	30W
开孔尺寸 Maintenance category:	Φ 85mm
装箱数 QTY/CTN:	12PCS



Accurate light distribution and control

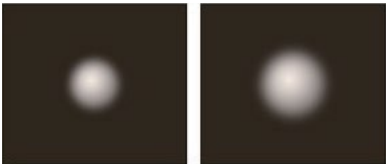


10°


24°

Diamond series have three kinds of beam angles, 10° 24°, meeting the different demands for lighting.

卡兹 KATZ
美术馆级光质量

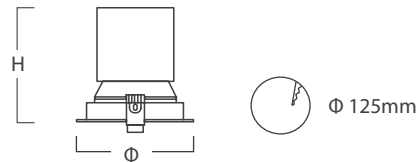

	Φ	H
20W	135	110
30W	135	132





产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-TH309520 02	3000K / 4000K	220-240V	12pcs	☐ WH
IG-TH309530 03	3000K / 4000K	220-240V	12pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-TH309520 02	IG-TH309530 03
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥1300 lm	≥1950 lm
光效率 Luminaire efficacy:	≥65lm/W	≥65lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	15D 24D 36D	15D 24D 36D
功率 Luminaire input power:	20W	30W
开孔尺寸 Maintenance category:	Φ 125mm	Φ 125 mm
装箱数 QTY/CTN:	12PCS	12PCS




Accurate light distribution and control

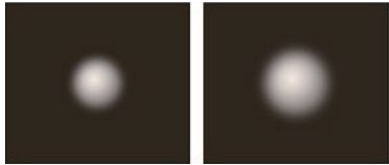

15° 24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.




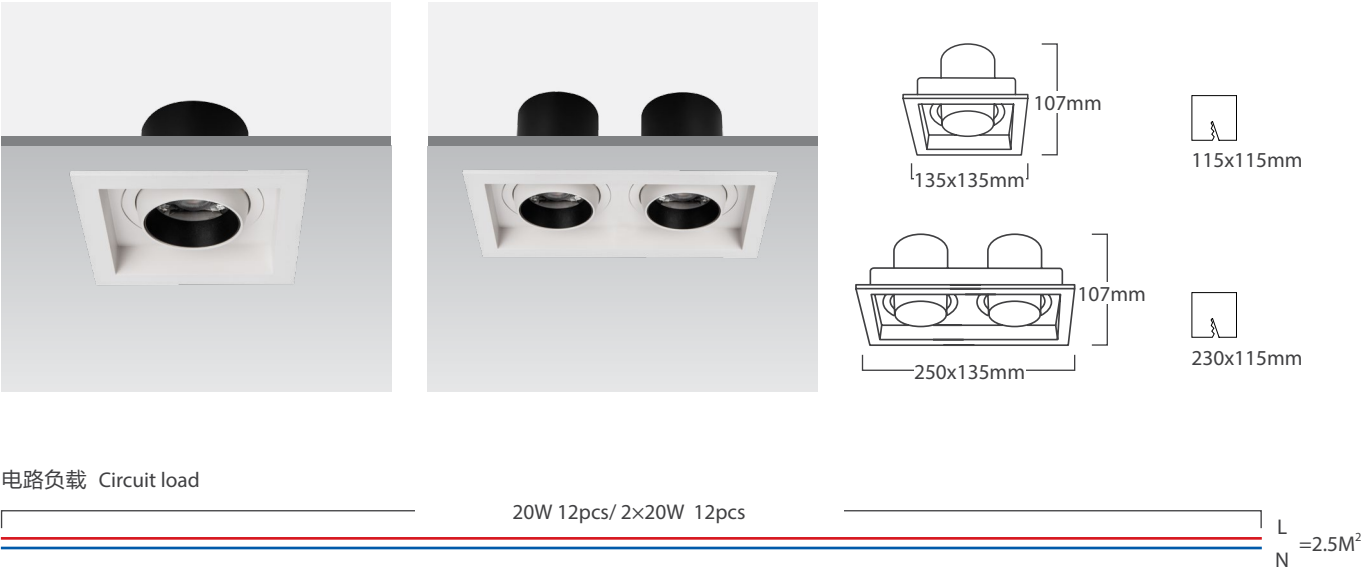


产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-GS311520 01	3000K / 4000K	220-240V	12pcs	☐ WH
IG-GS311530 02	3000K / 4000K	220-240V	12pcs	☐ WH

产品参数 PRODUCT DATA

产品描述 Description:	IG-GS311520 01	IG-GS311530 02
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥1300 lm	≥2×1950 lm
光效率 Luminaire efficacy:	≥65lm/W	≥65lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	12D 24D 36D	12D 24D 36D
功率 Luminaire input power:	20W	2×20W
开孔尺寸 Maintenance category:	115*115mm	230*115mm
装箱数 QTY/CTN:	12PCS	12PCS




Accurate light distribution and control

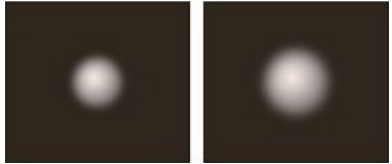


12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

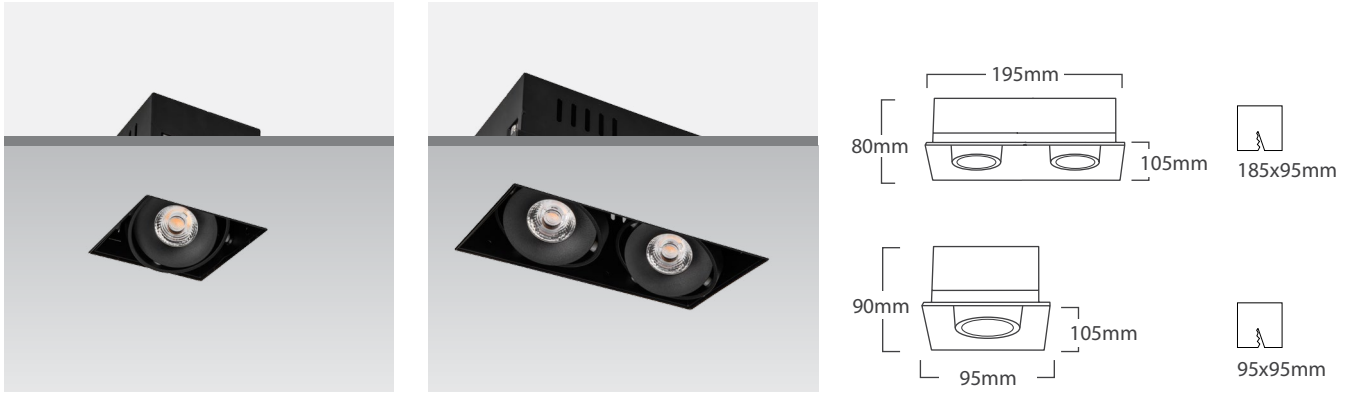

电路负载 Circuit load




产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-GS009508 01	3000K / 4000K	220-240V	30pcs	■ 8L
IG-GS009516 01	3000K / 4000K	220-240V	24pcs	■ 8L

产品参数 PRODUCT DATA

产品描述 Description:	IG-GS009508 01	IG-GS009516 01
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	520 lm	2 x520lm
光效率 Luminaire efficacy:	≥65lm/W	≥65lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	24D 36D	24D 36D
功率 Luminaire input power:	8W	2 x 8W
开孔尺寸 Maintenance category:	95x95mm	185x95mm
装箱数 QTY/CTN:	30PCS	24PCS




Accurate light distribution and control



24°

36°

Diamond series have three kinds of beam angles, 24° 36°, meeting the different demands for lighting.

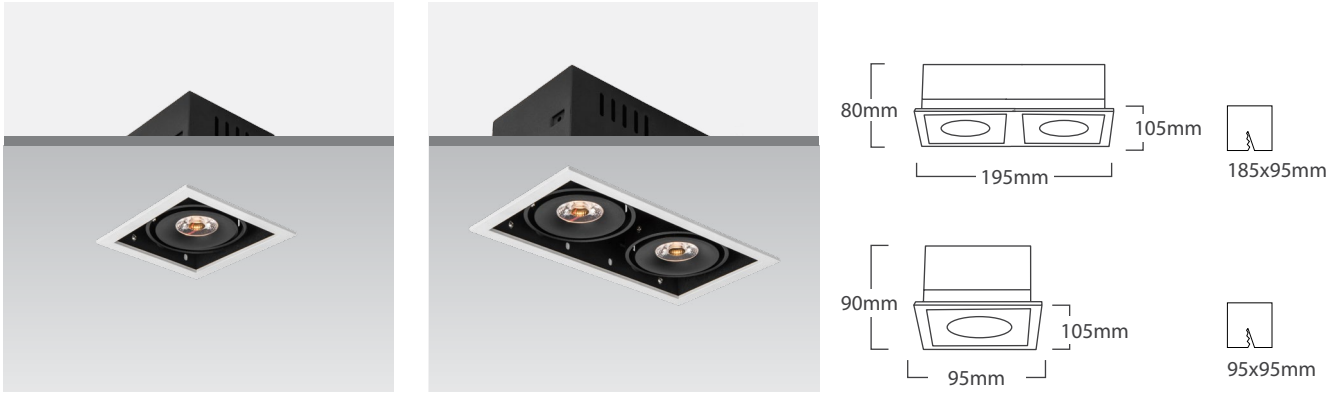

电路负载 Circuit load




产品选项 Selection


Description	Color temperature	ACV=	PS	Option
IG-GS009508 02	3000K / 4000K	220-240V	30pcs	■ 8L
IG-GS009516 02	3000K / 4000K	220-240V	24pcs	■ 8L

产品参数 PRODUCT DATA

产品描述 Description:	IG-GS009508 02	IG-GS009516 02
光源 Light Source:	COB	COB
光通量 Luminaire Luminous flux:	≥520lm	2 x520lm
光效率 Luminaire efficacy:	≥65lm/W	≥65lm/W
显色指数 Colour Rendering Index:	90	90
光束角 Beam angle:	24D 36D	24D 36D
功率 Luminaire input power:	8W	2 x 8W
开孔尺寸 Maintenance category:	95x95mm	185x95mm
装箱数 QTY/CTN:	30PCS	24PCS




Accurate light distribution and control

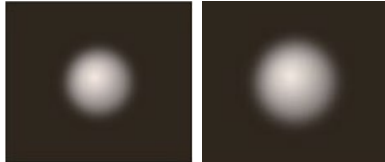

24°

36°

Diamond series have three kinds of beam angles, 24° 36°, meeting the different demands for lighting.

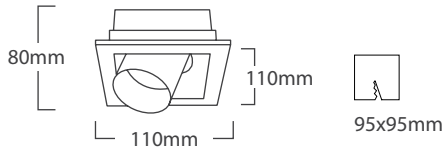

电路负载 Circuit load





产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-GS009408 01	3000K / 4000K	220-240V	30pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-GS009408 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	≥520 lm
光效率 Luminaire efficacy:	≥65lm/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	12D 24D 36D
功率 Luminaire input power:	8W
开孔尺寸 Maintenance category:	95x95mm
装箱数 QTY/CTN:	30PCS




Accurate light distribution and control



12°

24°

Diamond series have three kinds of beam angles, 12° 24°, meeting the different demands for lighting.

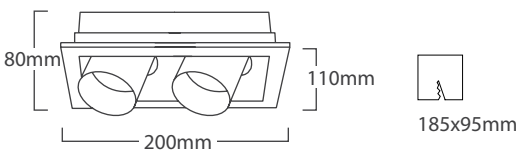

电路负载 Circuit load





产品选项 Selection

Description	Color temperature	ACV=	PS	Option
IG-GS009416 01	3000K / 4000K	220-240V	12pcs	WH BL GR

产品参数 PRODUCT DATA

产品描述 Description:	IG-GS009416 01
光源 Light Source:	COB
光通量 Luminaire Luminous flux:	2 x 520 lm
光效率 Luminaire efficacy:	≥65m/W
显色指数 Colour Rendering Index:	90
光束角 Beam angle:	15D 24D 36D
功率 Luminaire input power:	2 x 8W
开孔尺寸 Maintenance category:	185x95mm
装箱数 QTY/CTN:	12PCS



Accurate light distribution and control



15°


24°

Diamond series have three kinds of beam angles, 15° 24°, meeting the different demands for lighting.




Office lighting
办公照明


LED 线型灯

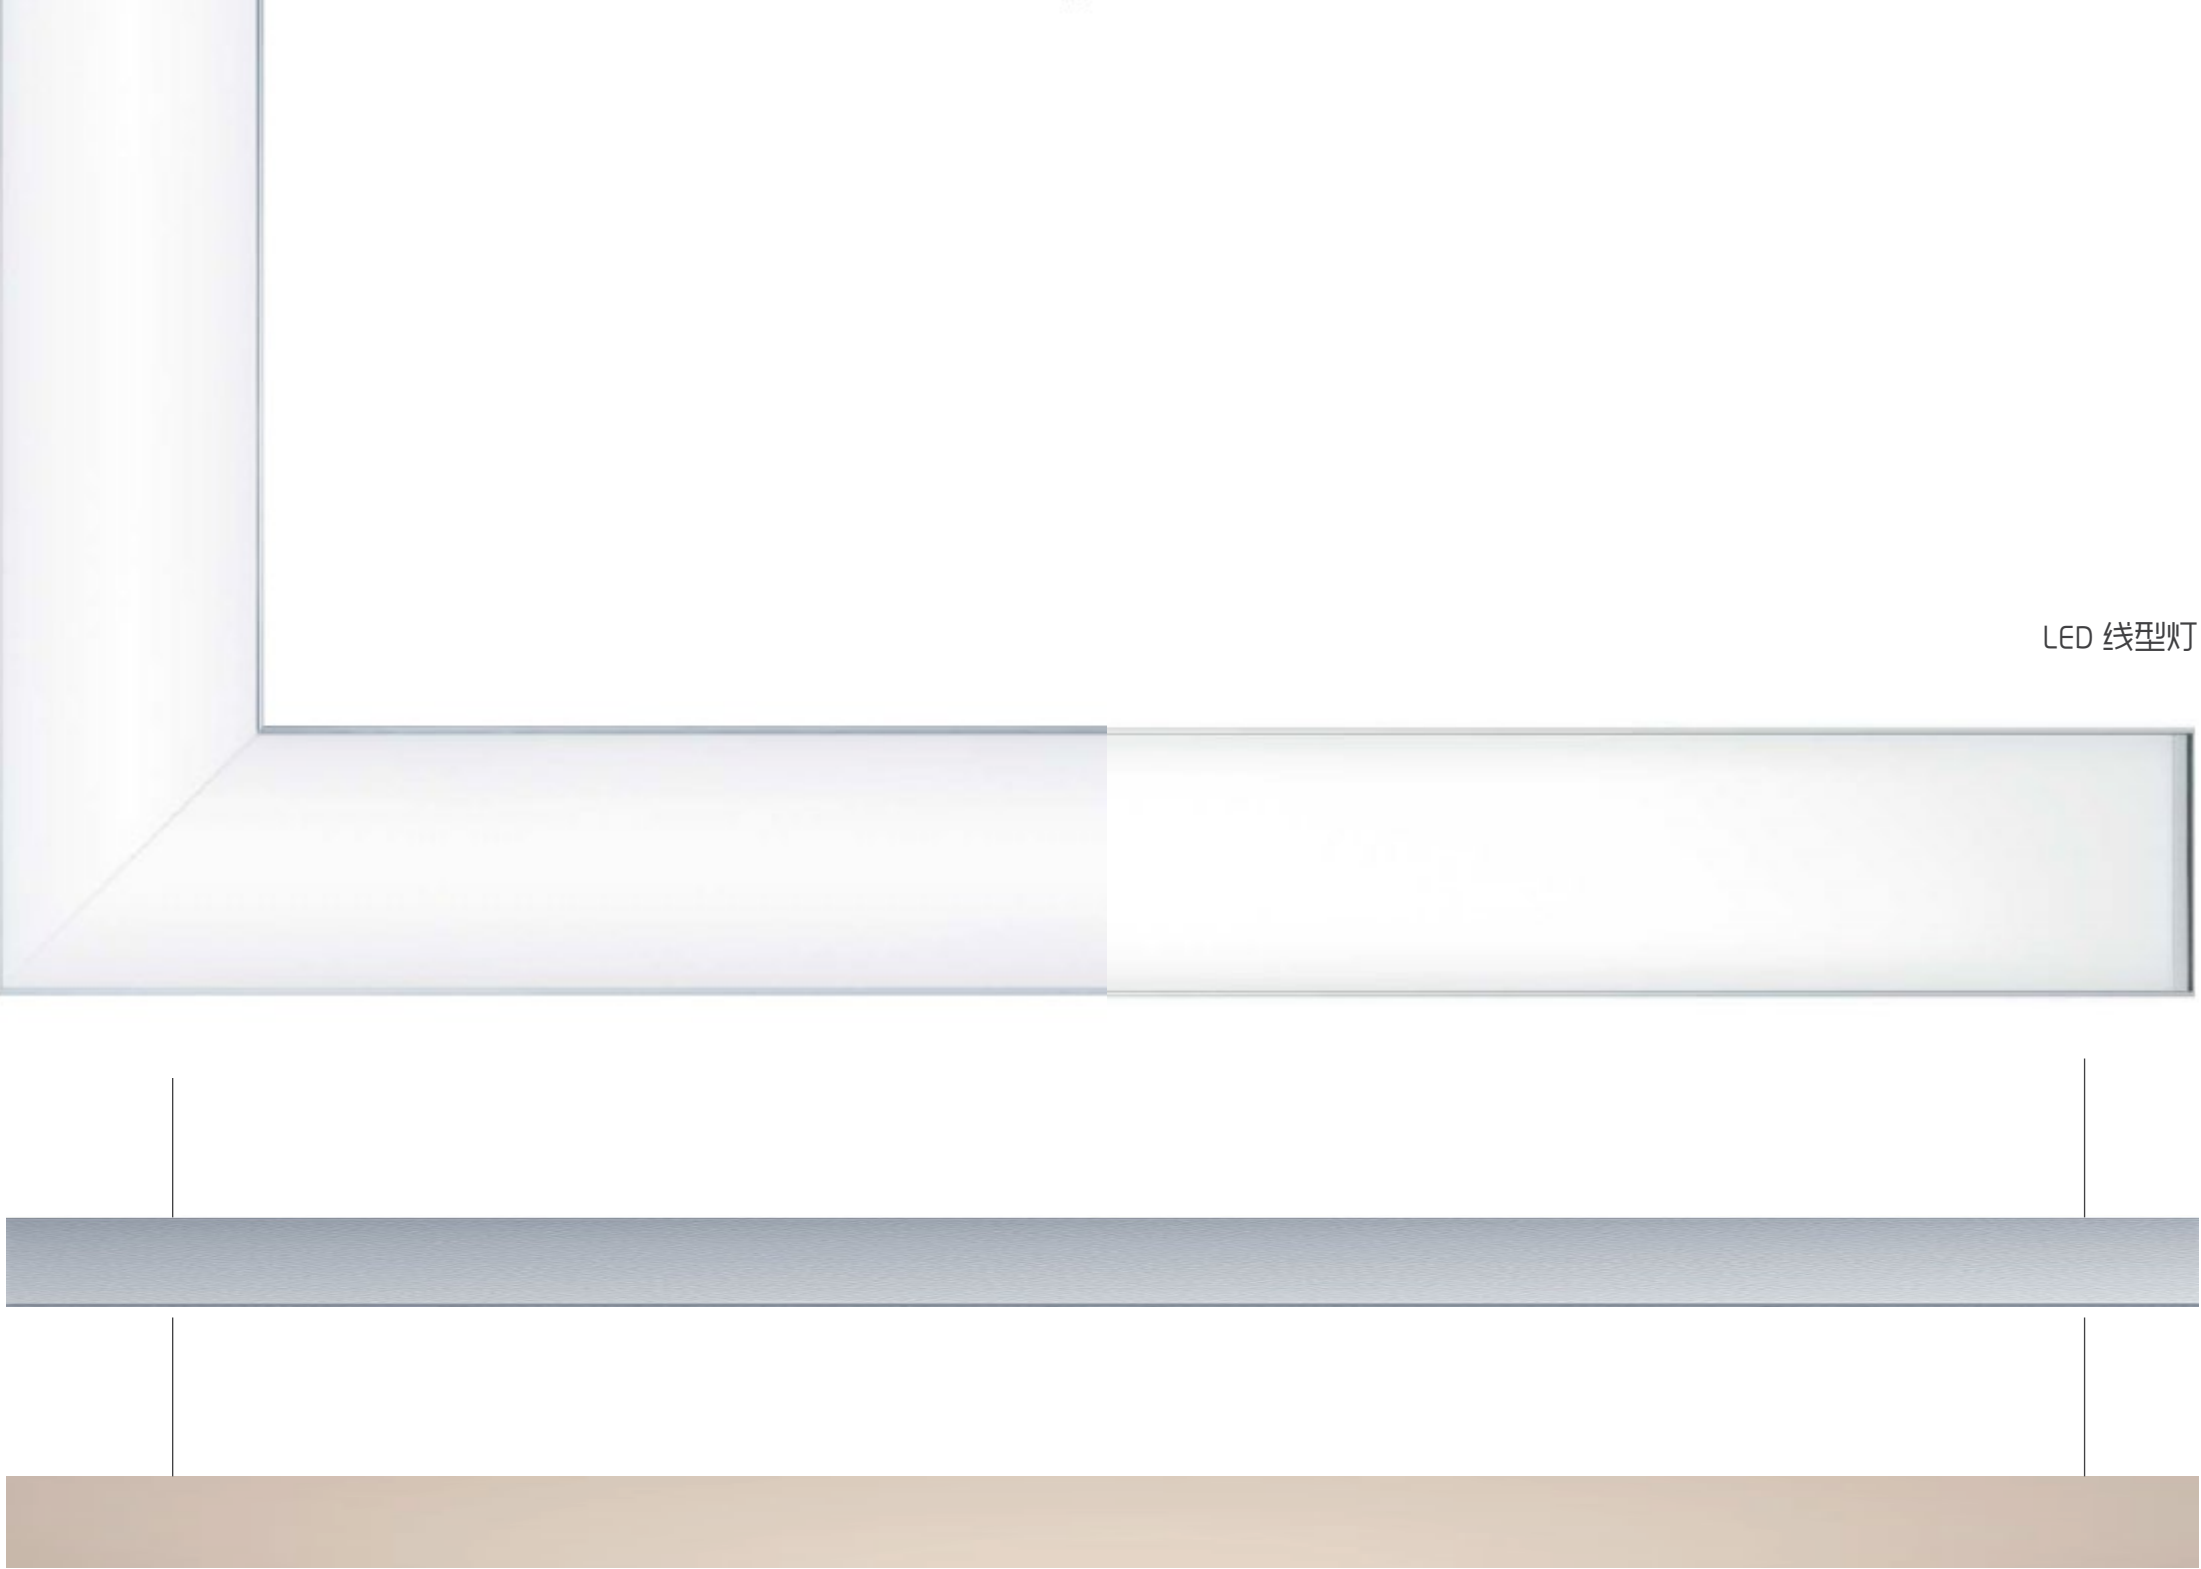

LED 线型灯

L=1180 可以无限拼接 - + L 口型

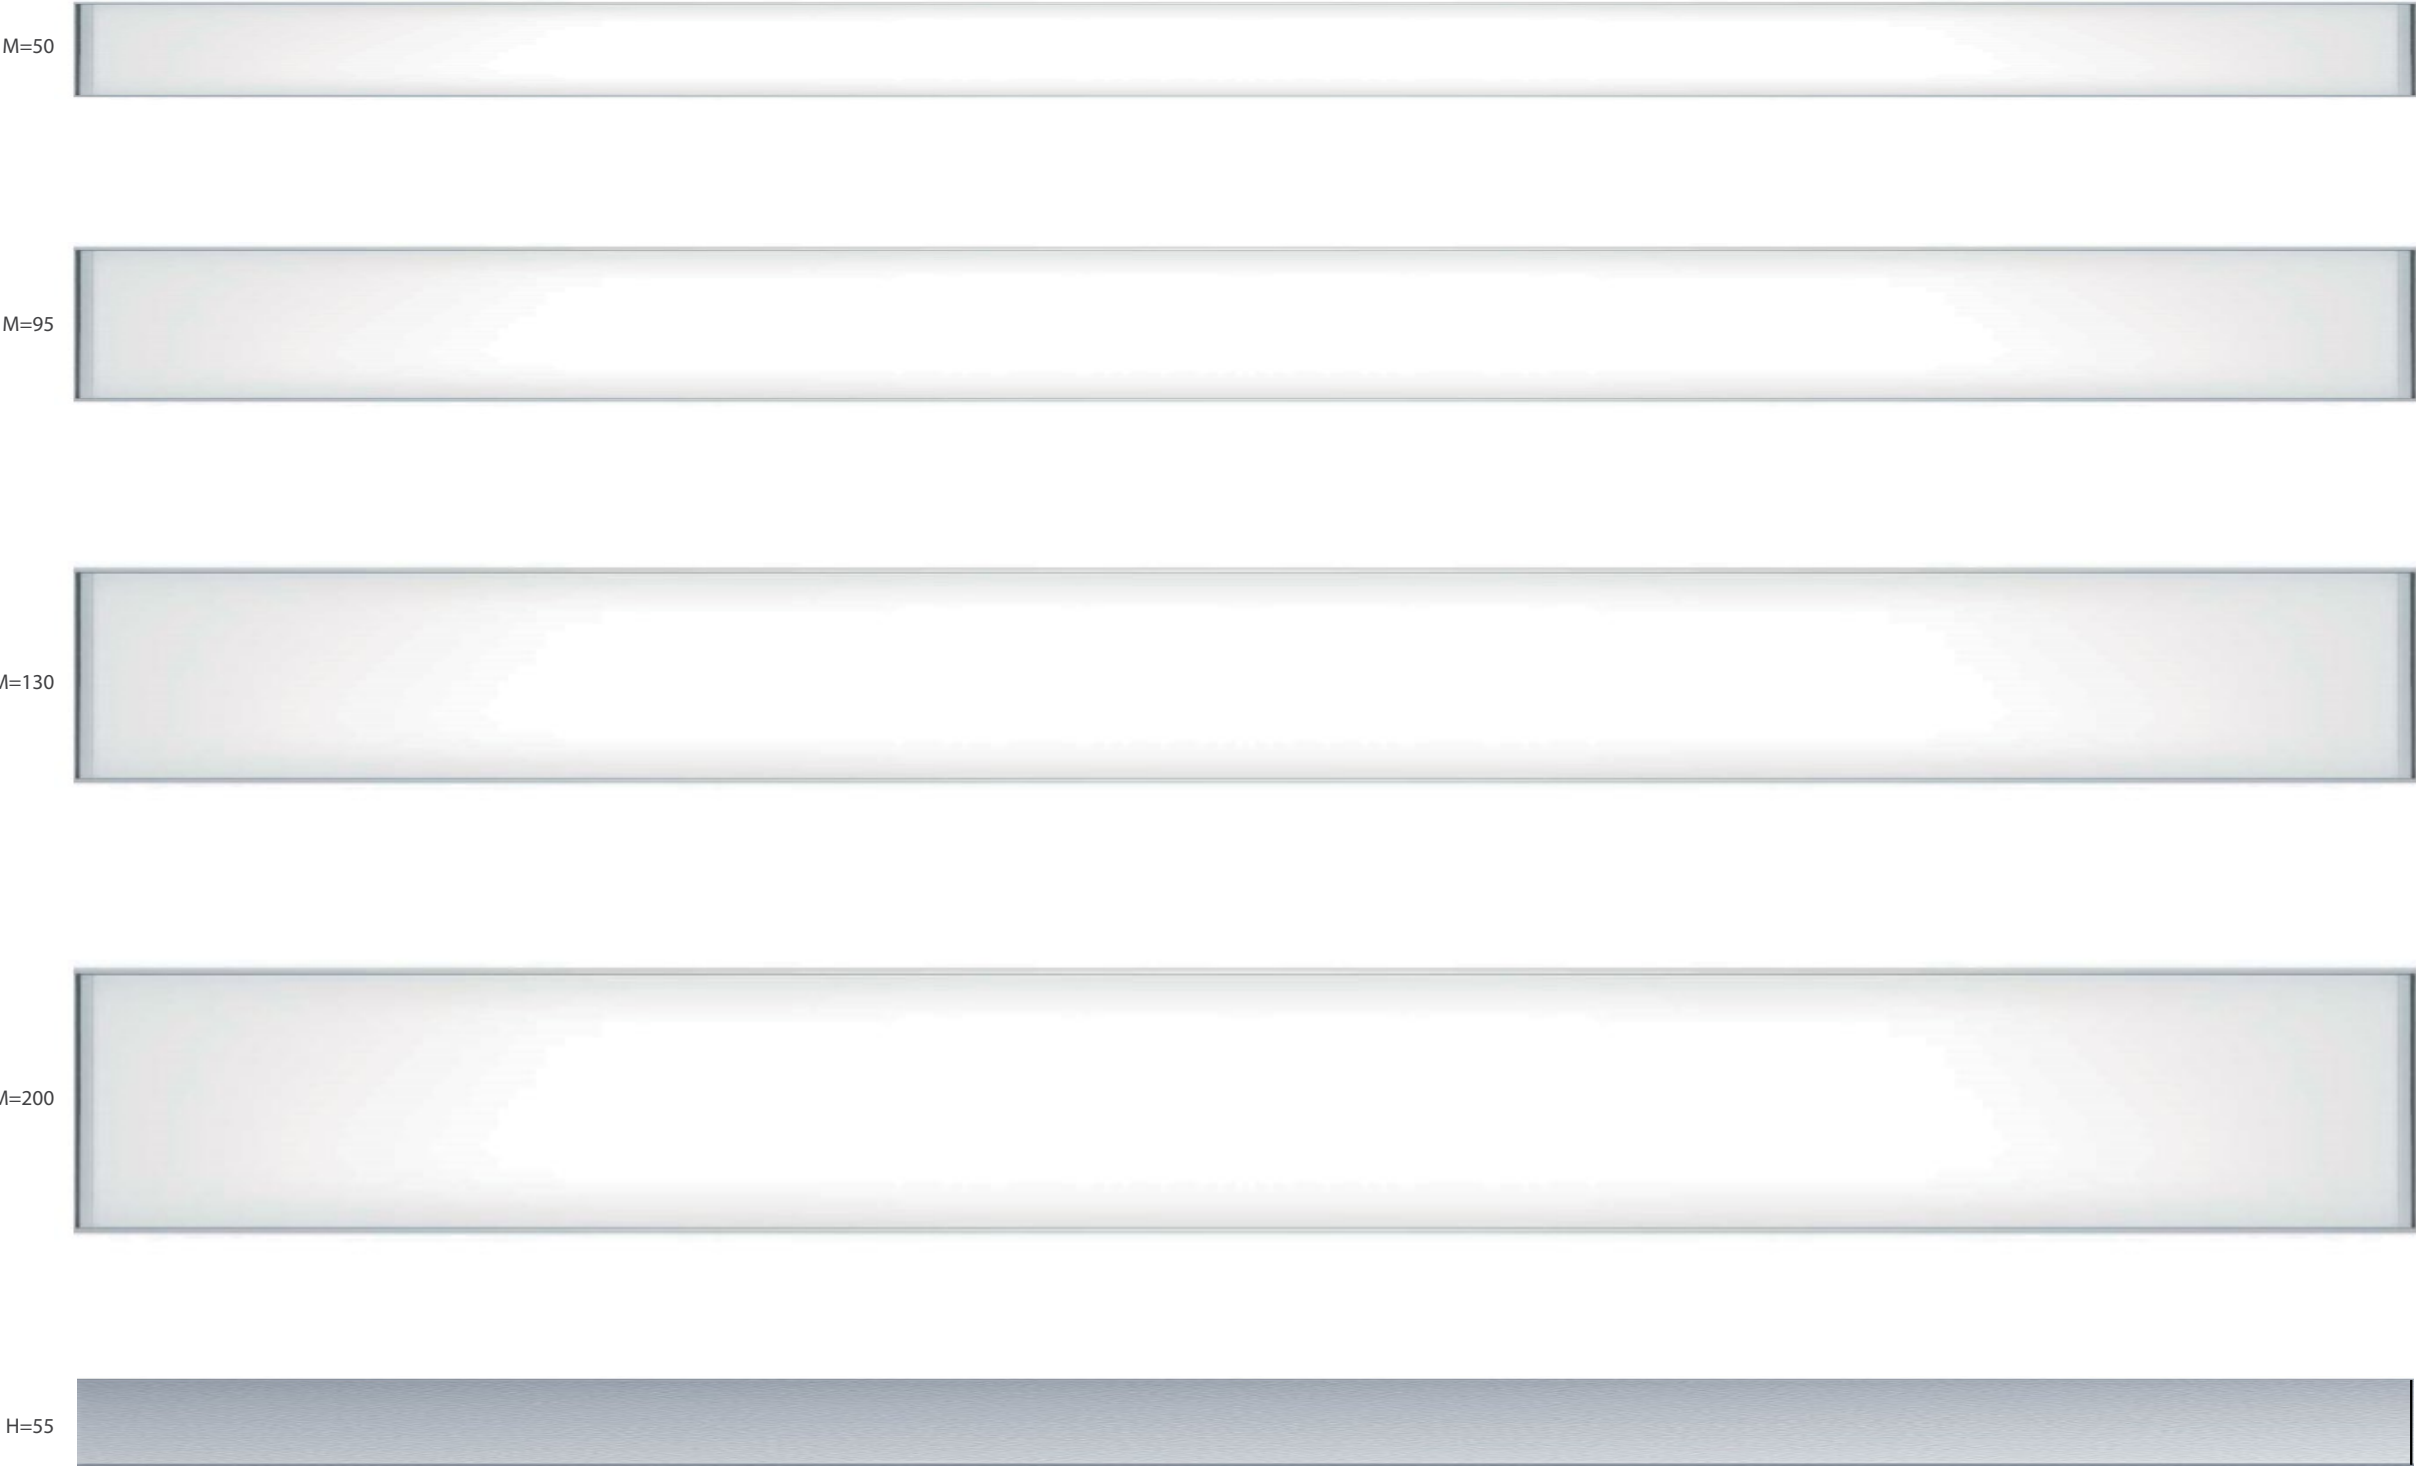

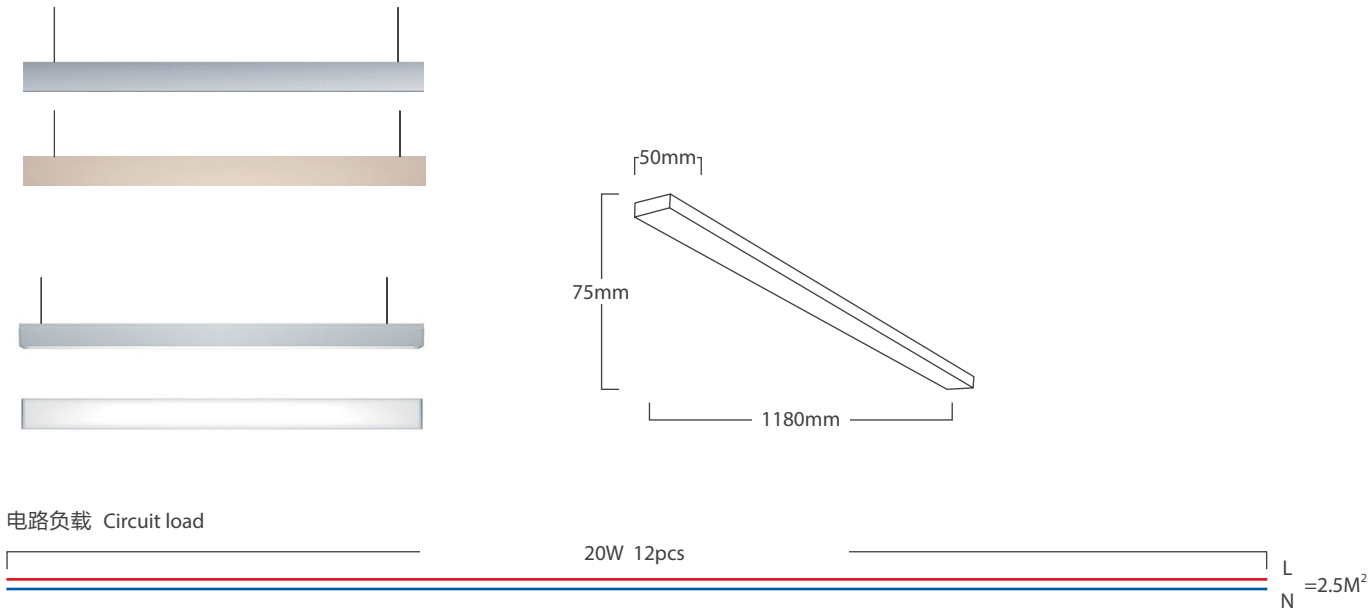


产品选项 Selection

Description	Color temperature	ACV=	PS
IG-XT012020	4700K	176-230V	8pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG-XT012020
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	1600 lm
光效率 Luminaire efficacy:	83lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	80D
功率 Luminaire input power:	20W
装箱数 QTY/CTN:	8PCS


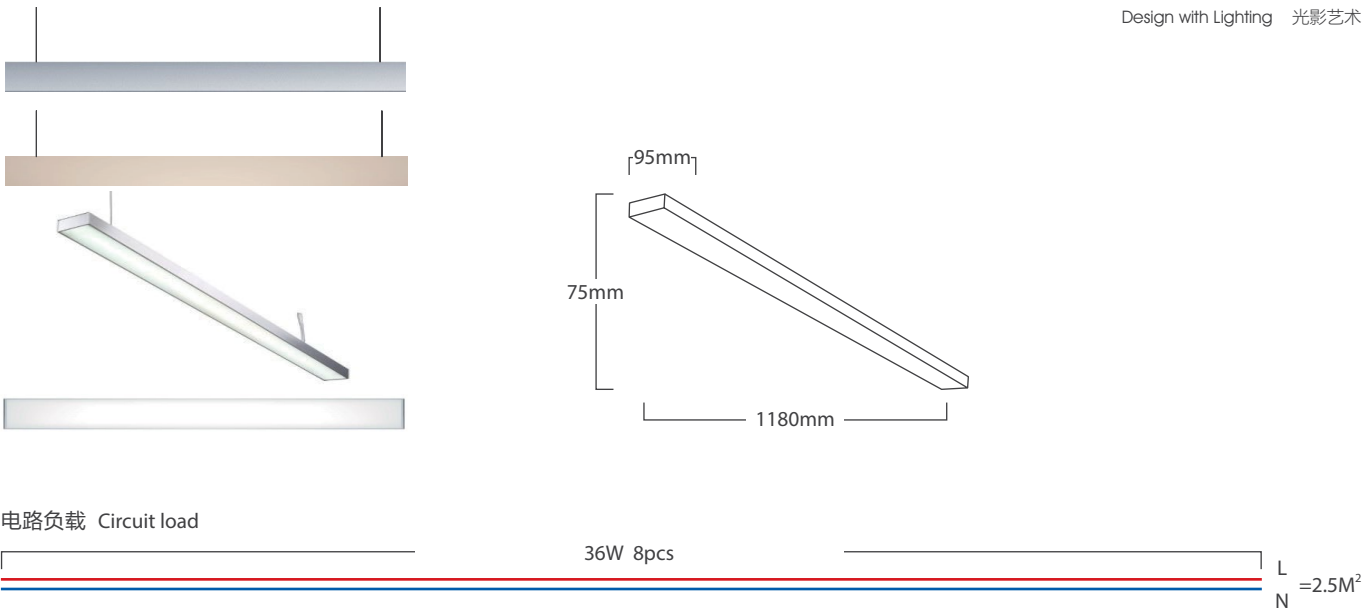



产品选项 Selection

Description	Color temperature	ACV=	PS
IG-XT012036	4700K	176-230V	8pcs


产品参数 PRODUCT DATA

产品描述 Description:	IG-XT012036
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	2800 lm
光效率 Luminaire efficacy:	86lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	80D
功率 Luminaire input power:	36W
装箱数 QTY/CTN:	8PCS



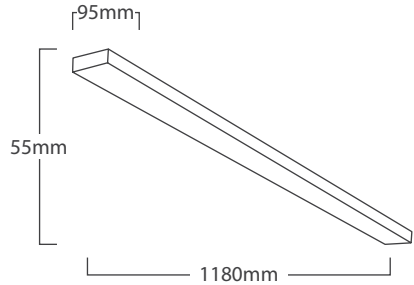

电路负载 Circuit load








产品选项 Selection


Description	Color temperature	ACV=	PS
IG-XT012030/IG-XT012036	3000K / 4700K	176-230V	8pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG-XT012030 / IG-XT012036
光源 Light Source:	COB / SMD
光通量 Luminaire Luminous flux:	2600 lm+2400 lm
光效率 Luminaire efficacy:	86lm/W
显色指数 Colour Rendering Index:	90+80
光束角 Beam angle:	10D 80D
功率 Luminaire input power:	30W / 36W
装箱数 QTY/CTN:	8PCS

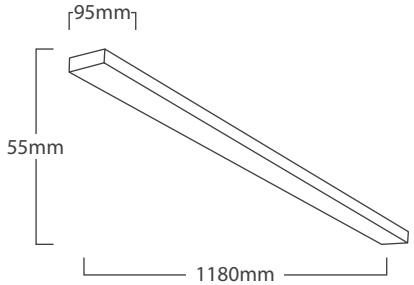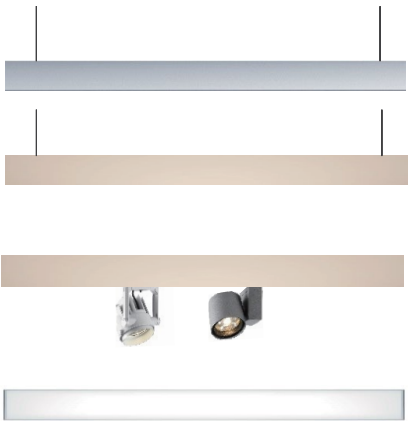

电路负载 Circuit load







产品选项 Selection

Description	Color temperature	ACV=	PS
IG-XT012030/IG-XT012036	3000K / 4700K	176-230V	8pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG-XT012030 / IG-XT012036
光源 Light Source:	COB / SMD
光通量 Luminaire Luminous flux:	2600 lm+2400 lm
光效率 Luminaire efficacy:	86lm/W
显色指数 Colour Rendering Index:	90+80
光束角 Beam angle:	10D 80D
功率 Luminaire input power:	30W / 36W
装箱数 QTY/CTN:	8PCS





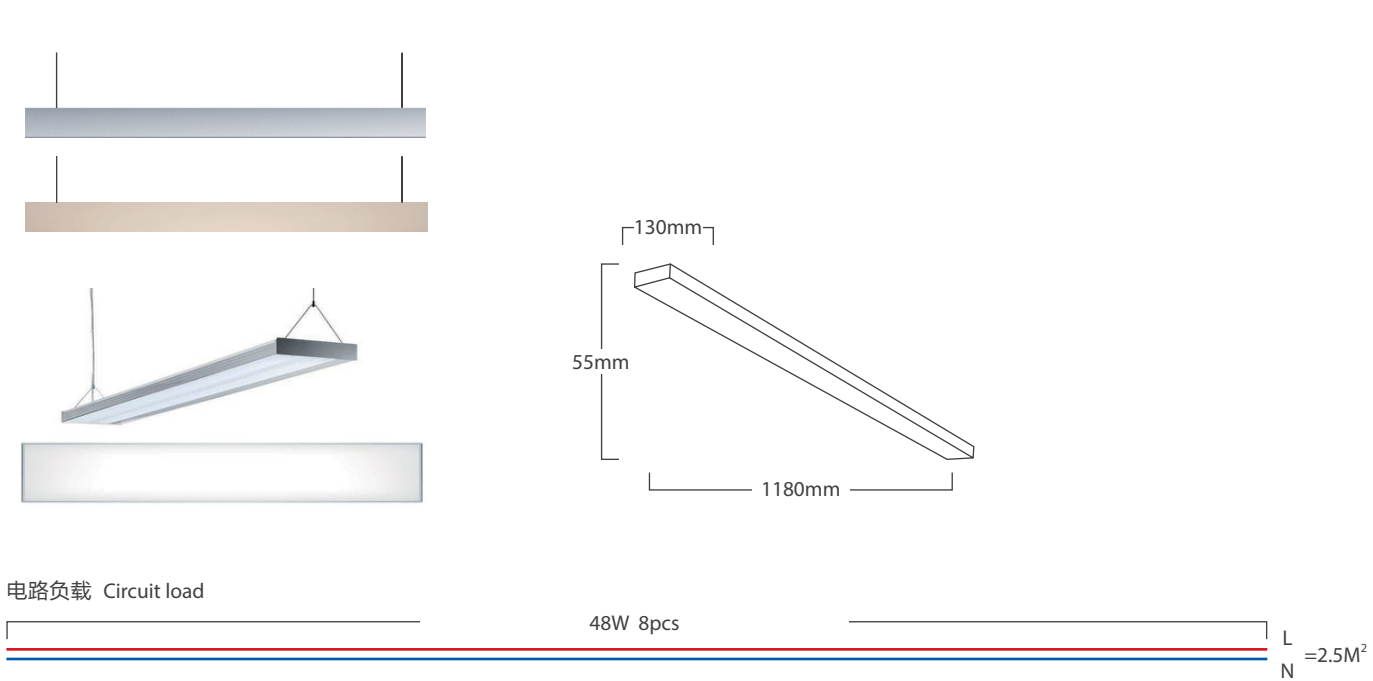


产品选项 Selection

Description	Color temperature	ACV=	PS
IG-XT012048	4700K	176-230V	8pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG-XT012048
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	3200 lm
光效率 Luminaire efficacy:	86lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	80D
功率 Luminaire input power:	48W
装箱数 QTY/CTN:	8PCS

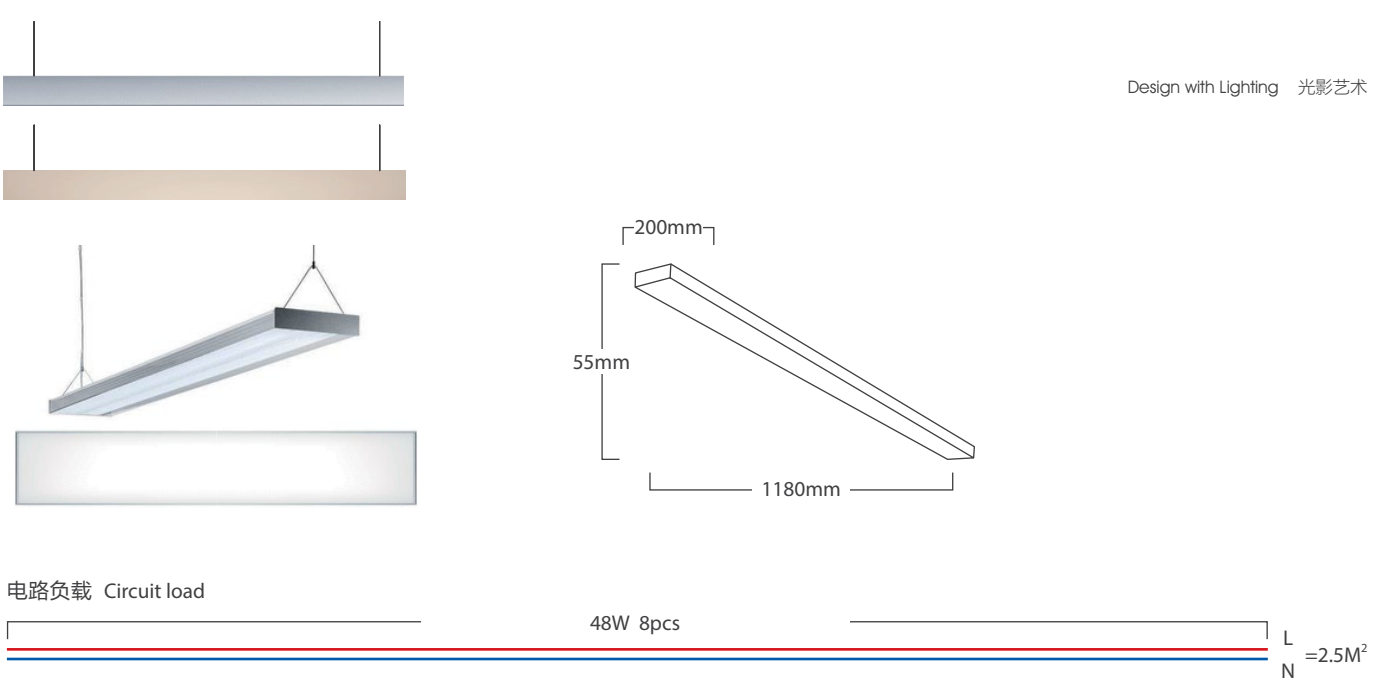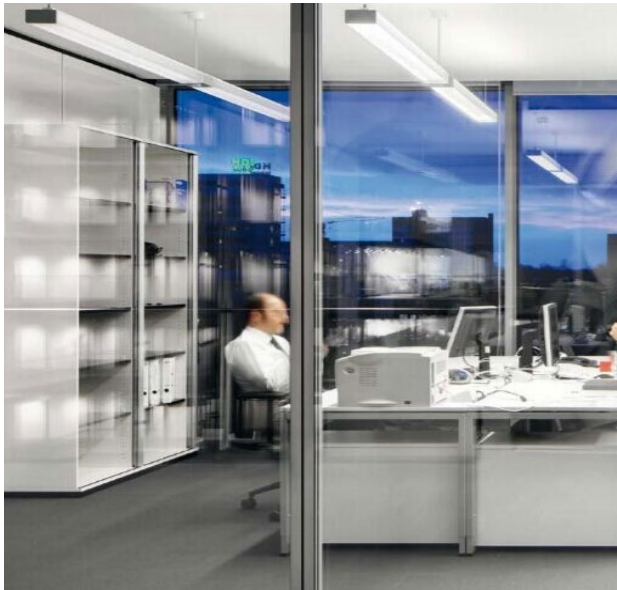


产品选项 Selection

Description	Color temperature	ACV=	PS
IG-XT012048	4700K	176-230V	8pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG-XT012048
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	3200 lm
光效率 Luminaire efficacy:	86lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	80D
功率 Luminaire input power:	48W
装箱数 QTY/CTN:	8PCS





产品参数 PRODUCT DATA


产品描述 Description:	IG-BGA06015	IG-BGA09020	IG-BGA12030	IG-BGA15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 30W	SMD 45W
光通量 Luminaire Luminous flux:	1250 lm	1650 lm	2460 lm	3350 lm
颜色 Colour:	Sliver	Sliver	Sliver	Sliver
尺寸 Size:	580 x 55 x 78mm	890 x 55 x 78mm	1180 x 55 x 78mm	1480 x 55 x 78mm



产品参数 PRODUCT DATA


产品描述 Description:	IG-BGB06030	IG-BGB09040	IG-BGB12060	IG-BGB15090
光源 Light Source:	SMD 30W	SMD 40W	SMD 60W	SMD 90W
光通量 Luminaire Luminous flux:	2400 lm	3200 lm	4800 lm	7200 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 43 x 132mm	890 x 43 x 132mm	1180 x 43 x 132mm	1480 x 43 x 132mm



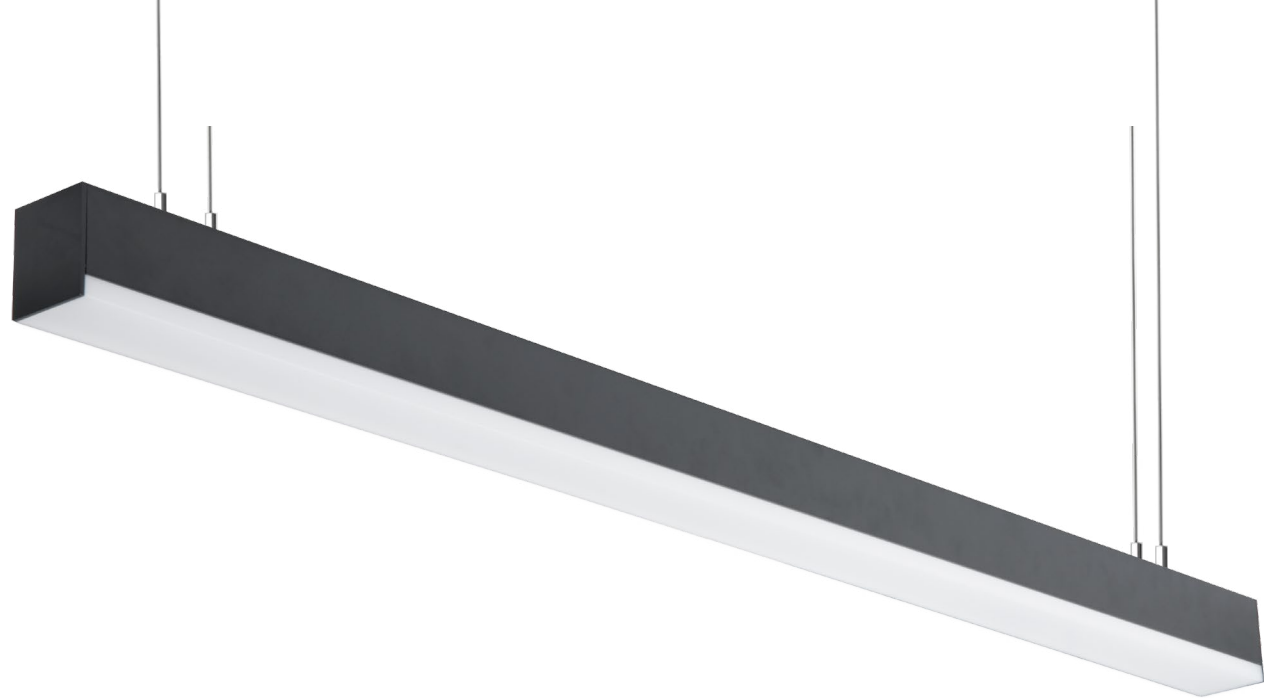

产品参数 PRODUCT DATA

产品描述 Description:	IG-BGC06015	IG-BGC09020	IG-BGC12035	IG-BGC15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 35W	SMD 45W
光通量 Luminaire Luminous flux:	1270 lm	1700 lm	2550 lm	3825 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 58 x 68mm	880 x 58 x 68mm	1180 x 58 x 68mm	1480 x 58 x 68mm

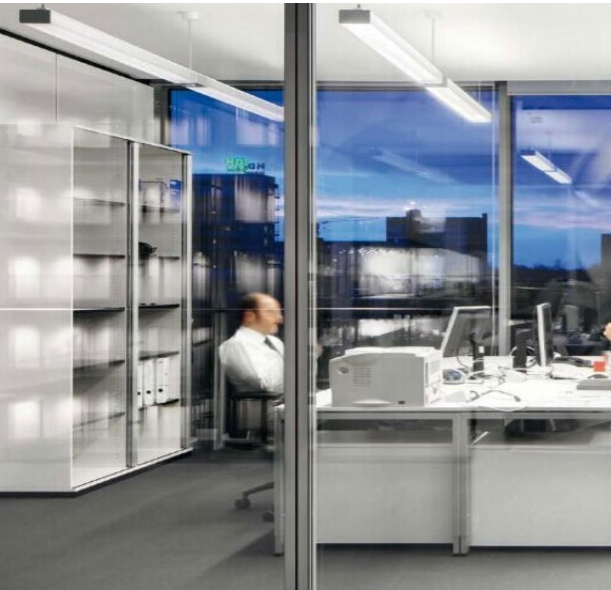

产品参数 PRODUCT DATA


产品描述 Description:	IG-BGD06025	IG-BGD09036	IG-BGD12045	IG-BGD15060
光源 Light Source:	SMD 25W	SMD 36W	SMD 45W	SMD 60W
光通量 Luminaire Luminous flux:	2125 lm	3060 lm	3825 lm	5100 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 95 x 106mm	890 x 95 x 106mm	1180 x 95 x 106mm	1480 x 95 x 106mm





产品参数 PRODUCT DATA

产品描述 Description:	IG-BGE06015	IG-BGE09020	IG-BGE12030	IG-BGE15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 30W	SMD 45W
光通量 Luminaire Luminous flux:	1250 lm	1650 lm	2460 lm	3750 lm
颜色 Colour:	Sliver	Sliver	Sliver	Sliver
尺寸 Size:	580 x 60 x 82mm	890 x 60 x 82mm	1180 x 60 x 82mm	1480 x 60 x 82mm

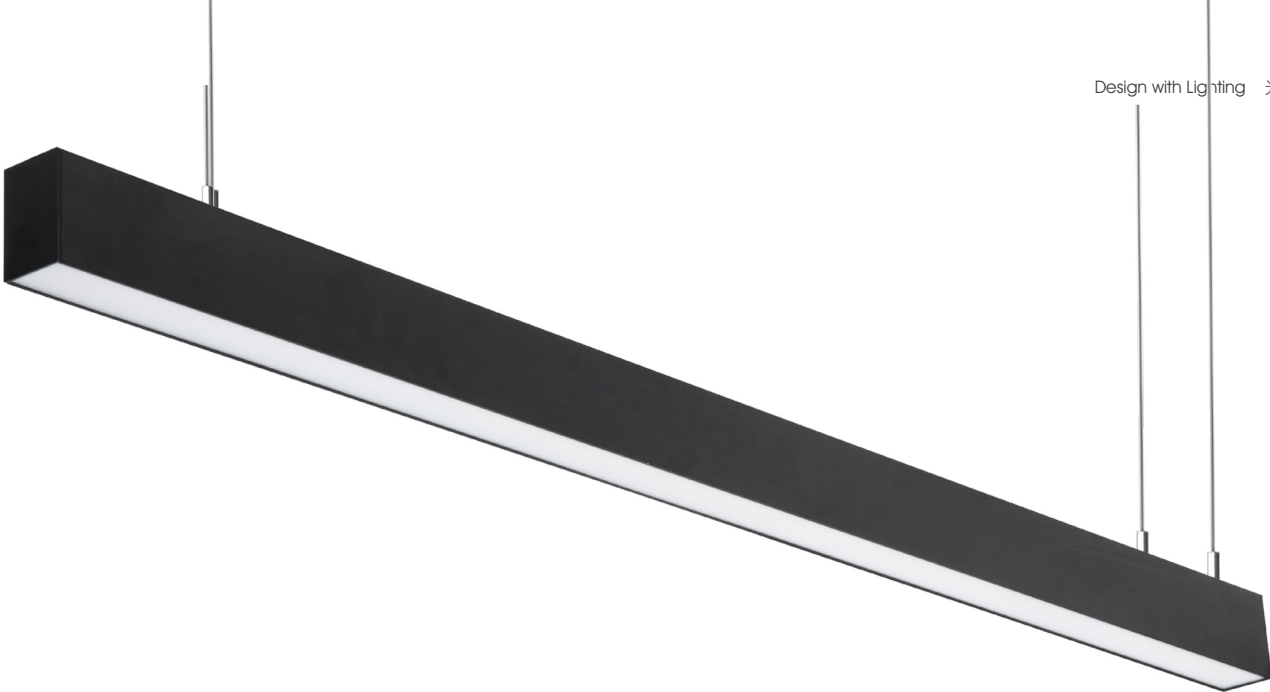

Design with Lighting 光影艺术

产品参数 PRODUCT DATA

产品描述 Description:	IG-BGF06015	IG-BGF09020	IG-BGF12030	IG-BGF15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 30W	SMD 45W
光通量 Luminaire Luminous flux:	1250 lm	1650 lm	2460 lm	3350 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 43 x 66mm	890 x 43 x 66mm	1180 x 43 x 66mm	1480 x 43 x 66mm






产品参数 PRODUCT DATA

产品描述 Description:	IG-BGG06015	IG-BGG09020	IG-BGG12030	IG-BGG15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 30W	SMD 45W
光通量 Luminaire Luminous flux:	1250 lm	1650 lm	2460 lm	3750 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 60 x 82mm	890 x 60 x 82mm	1180 x 60 x 82mm	1480 x 60 x 82mm



产品参数 PRODUCT DATA

产品描述 Description:	IG-BGH06005	IG-BGH09010	IG-BGH12015	IG-BGH15020
光源 Light Source:	SMD 5W	SMD 10W	SMD 15W	SMD 20W
光通量 Luminaire Luminous flux:	450 lm	950 lm	1400 lm	1900 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 43 x 66mm	890 x 43 x 66mm	1180 x 43 x 66mm	1480 x 43 x 66mm

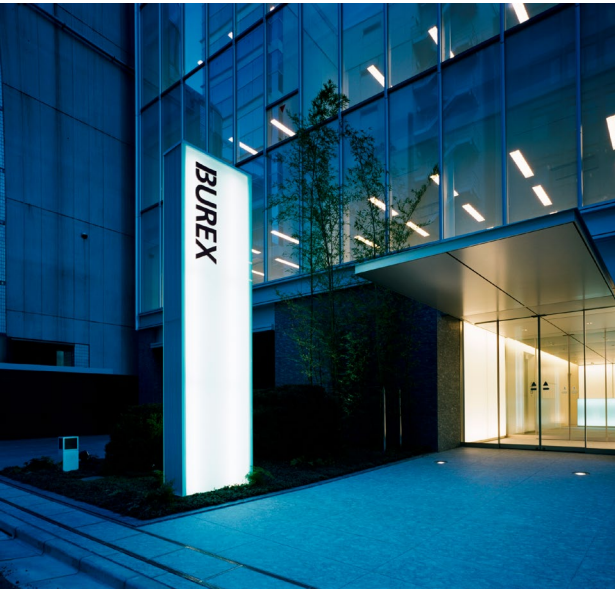



产品参数 PRODUCT DATA

产品描述 Description:	IG-BGI06015	IG-BGI09020	IG-BGI12030	IG-BGI15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 30W	SMD 45W
光通量 Luminaire Luminous flux:	1250 lm	1650 lm	2460 lm	3750 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 43 x 102mm	890 x 43 x 102mm	1180 x 43 x 102mm	1480 x 43 x 102mm

产品参数 PRODUCT DATA

产品描述 Description:	IG-BGJ06015	IG-BGJ09020	IG-BGJ12030	IG-BGJ15045
光源 Light Source:	SMD 15W	SMD 20W	SMD 30W	SMD 45W
光通量 Luminaire Luminous flux:	1250 lm	1650 lm	2460 lm	3750 lm
颜色 Colour:	Black	Black	Black	Black
尺寸 Size:	580 x 60 x 82mm	890 x 60 x 82mm	1180 x 60 x 82mm	1480 x 60 x 82mm





产品选项 Selection

Description	Color temperature	ACV=	PS
IG-ZB060005	3000K	176-230V	8pcs

产品参数 PRODUCT DATA

产品描述 Description:	IG ZB060005
光源 Light Source:	SMD
光通量 Luminaire Luminous flux:	4800 lm
光效率 Luminaire efficacy:	86lm/W
显色指数 Colour Rendering Index:	80
光束角 Beam angle:	15D 25D 36D
功率 Luminaire input power:	5 x 1W
装箱数 QTY/CTN:	8PCS





产品参数 PRODUCT DATA

产品描述 Description:	IG-DPA06030	IG-DPA31230	IG-DP36020	IG-DP61245
功率 Power:	10W x3	15W x2	10W x2	15W x3
光通量 Luminaire Luminous flux:	2100 lm	2100 lm	1400 lm	3150 lm
外观尺寸 Size:	598x598x65mm	1198x298x65mm	598x298x65mm	1198x598x65mm
开孔尺寸 Cutout size:	580x580mm	1180x280mm	580x280mm	1180x580mm
色温 CCT:	4000K / 6000K	4000K / 6000K	4000K / 6000K	4000K / 6000K
输入功率 Input:	AC 200-240, 50Hz	AC 200-240, 50Hz	AC 200-240, 50Hz	AC 200-240, 50Hz
包装 Package:	2PCS	2PCS	2PCS	2PCS




产品参数 PRODUCT DATA

产品描述 Description:	IG-DPB06030	IG-DPB31230
功率 Power:	10W x3	15W x2
光通量 Luminaire Luminous flux:	2800 lm	2800 lm
外观尺寸 Size:	598x598x65mm	1198x298x65mm
开孔尺寸 Cutout size:	580x580mm	1180x280mm
色温 CCT:	4000K / 6000K	4000K / 6000K
输入功率 Input:	AC 200-240, 50Hz	AC 200-240, 50Hz
包装 Package:	2PCS	2PCS





DC 直流系列 IP67/68 硅胶挤出防水

IP20 DC直流系列		-- 软板	不防水
IP54 DC直流系列		-- PU胶/硅胶 -- 软板	防露水 尺寸变更少 滴胶工艺
IP65 DC直流系列		-- 硅胶套管 -- 软板	防露水 色漂变更少 套管工艺
IP67 DC直流系列		-- PU胶/硅胶 -- 硅胶套管 -- 软板	可短时间浸水 灌胶工艺
IP68 DC直流系列		-- PU胶/硅胶 -- 硅胶套管 -- 软板	可长期浸水 注胶工艺
IP54⁺ DC直流系列		-- 硅胶挤出套管 -- 软板	防露水 尺寸变更少 无色漂 硅胶挤出工艺，模具成型
IP67⁺ DC直流系列		-- 硅胶挤出套管 -- 软板	可短时间浸水 无色漂 硅胶挤出工艺，模具成型
IP68⁺ DC直流系列		-- 硅胶挤出套管 -- 软板	可长期浸水 硅胶挤出工艺，模具成型
室内/户外 AC交流系列		-- PVC套管 -- 软板	防露水/雨水 色漂变更少 PVC 挤出工艺，模具成型



产品参数 PRODUCT DATA

产品描述 Description:	IG-ZJ03003	IG-ZJ06006
光源 Light Source:	SMD 3W	SMD
光通量 Luminaire Luminous flux:	300 lm	600 lm
尺寸 Size:	300mm	600mm
色温 CCT:	3000K / 4000K / 6000K	3000K / 4000K / 6000K
输入电压 Input:	AC 200-240V	AC 200-240V
包装 Package:	30/pcs	30/pcs



IG-ZJ09009	IG-ZJ12012
SMD	SMD
900 lm	1200 lm
900mm	1200mm
3000K / 4000K / 6000K	3000K / 4000K / 6000K
AC 200-240V	AC 200-240V
30/pcs	30/pcs

1. 专门为超长使用场景而特殊定制，最长可达 50 米，使用 24V 低压安全输入电压，有恒压、恒流和温感恒流设计可供选择。
2. 此硅胶挤出工艺外观高档、有质感，透光率高，同样适用于常规的 5 米 LED 灯条。
3. IP67/68 高等级的防尘防水保护，且 IP67 版本无颜色漂移。
4. 硅胶套管内侧呈凹透镜形状，LED 光扩散面会更加宽广。
5. 先进的机械化硅胶挤出工艺，一体成型的产品尺寸精准，冷挤出无须额外烘干，提高产品质量的稳定性和制造产能，节省了人工组装工序。
6. 使用耐候性强的硅胶作为挤出材料，耐低温、耐酸碱、抗 UV 、对人体无害。
7. 可剪切、可接驳，使用和安装方便。
8. 3 万小时长寿命，CE 、RoHS 认证。

产品参数 PRODUCT DATA

产品描述 Description:	IG-DD002413	IG-DD002412	IG-DD002424
光源 Light Source:	2835 SMD 13W/m	5050 SMD 12W/m	2835 SMD 2.4W/m
光通量 Luminaire Luminous flux:	1150 LM/m	1000 LM/m	270 LM/m
色温 CCT:	2700K / 4000K / 5000K	2700K / 4000K / 5000K	2700K / 4000K / 5000K
剪切长度 Cut size:	6pcs/10cm	6pcs/10cm	6pcs/10cm
电路负载 Circuit load:	5m	5m	40m
驱动 Driver:	恒压 24V	恒压 24V	温感恒流 24V
IP 等级 Protection Degree:	IP67	IP67	IP67

IG-DD022006	IG-DD022012
2835 SMD 6W/m	2835 SMD 12W/m
600 LM/m	1200 LM/m
2700K / 4000K / 5000K	2700K / 4000K / 5000K
84pcs/100cm	70pcs/20cm
50m	50m
温感恒流 24V	双芯限流免驱动高压
IP67	IP67

Notes:

[illegible]